

# PROFESSIONAL SOLUTIONS PRODUCT GUIDE



 **RUST-OLEUM**



# QUALITY PRODUCTS ARE JUST THE BEGINNING

## SINCE 1921...

Rust-Oleum Corporation was founded on the principle of producing the highest quality labor saving coatings; and after 100 years, Rust-Oleum has been the trusted name for superior solutions that promises long-lasting protection and superior coverage. Today, Rust-Oleum Corporation is a worldwide leader in protective paints, coatings and value added products for both the home and industry.

## FAST AND DURABLE, EASY AND REPEATABLE

Rust-Oleum is dedicated specifically to meeting the diverse needs of the industrial and commercial markets and providing solutions to problems caused by rust, heat, abrasion, chemicals and corrosive environments. This product guide showcases our distinct brands of protective paints, floor coatings and cleaners.



Products accompanied by this symbol carry a **RUST-PROOF GUARANTEE** with maximum corrosion protection.\*

\*See Technical Data Sheets and Rust-Proof Guarantee forms for information.



View all of our  
Professional Solutions  
products online

• TRUSTED QUALITY SINCE 1921 •

# RUST-OLEUM®

## PROFESSIONAL SOLUTIONS COATINGS

### HIGH PERFORMANCE

The ultimate protection for industrial environments that are formulated with the highest quality pigments and resin systems. These proprietary formulations are designed for severe industrial environments and are backed by a Rust-Proof Guarantee. The High Performance brand is the foundation of Rust-Oleum Corporation.

### INDUSTRIAL CHOICE®

When you do not need the ultimate protection for severe industrial environments that our High Performance brand provides, we offer Industrial Choice®. Industrial Choice is our multi-purpose line of coatings that are designed for mild to moderate industrial environments, and complements our High Performance offering, making Rust-Oleum the best choice for all of your coating needs.

### COMMERCIAL

Looks are everything. Protect your company's assets with Rust-Oleum Commercial coatings. Our Commercial coatings line offers solutions for all types of areas that require a coating to handle light to moderate environments that are washable and abrasion resistant.

### SIERRA PERFORMANCE™

Industrial strength acrylics and epoxies that have low odor, low VOC and low hazardous air pollutants. These coatings dry fast and contain no additional solvents, letting you paint without disruptive paint odors. Sierra Performance™ coatings are ideal for mild to moderate industrial environments. Offered to you by Rust-Oleum, you can trust that they are as durable as higher VOC products..

### CONCRETE SAVER®

Durable, easy to apply floor coatings that protect concrete in mild to moderate industrial environments. Concrete Saver floor coatings are easy to apply and can be installed by in-house maintenance personnel or by painting contractors. Concrete Saver® offers a complete range of floor coatings that includes anti-slip and decorative finishes for all of your floor coating needs.

# Product Guide Contents

Professional Solutions Coatings Selection Guide	5
Professional Solutions Coatings Chemical & Corrosion Resistance Guide	8
Safety Color Coding & Pipe Identification Guides	10

SPRAY PAINT		11
SYSTEM	DESCRIPTION	PAGE
V2100 System	Rust-Preventive Enamel	12
V2100 System	Enamel Primer	12
1600 System	Multi-Purpose Enamel	13
V2100 System	Galvanizing Compound	14
V2100 System	High Heat Coating	14
V2100 System	Rust Reformer®	14
VK9300 System	Two-Component Epoxy Primer	15
UTILI-T	Multi-Purpose Spray Paint	15
RB1600 System	Green Rebar Epoxy	16
1600 System	Galvanizing Compound	16

STRIPING & MARKING PAINT		17
SYSTEM	DESCRIPTION	PAGE
M1600/M1800 System	Precision Line® Inverted Marking Paint	18
M1400 System	Construction Marking Paint	19
V2300 System	Inverted Striping Paint	20
2300 System	Inverted Striping Paint	20
2300 System	Traffic Zone Striping Paint	21
S1600 System	Inverted Striping Paint	21
MC1800 System	Precision Line® Inverted Marking Chalk	21
AF1600 System	Athletic Field Inverted Striping Paint	22
	Companion Products	23
	Livestock Marking Paint	24

COATINGS		25
TINT CENTER		26
SYSTEM	DESCRIPTION	PAGE
High Performance	ROCPriME® Universal Alkyd Primer 340/100	27
High Performance	ROCAlyd® Direct-To-Metal Alkyd Enamel 7400/V7400/CV740	28
High Performance	ROCPriME® 769 Damp Proof Alkyd Primer	30
High Performance	High Heat Coatings	31
Commercial	Universal Acrylic Primer	32
The MULE	Modified Urethane Latex Epoxy	33
High Performance	Noxyde® Elastomeric Acrylic Coating	34
Sierra Performance™	Beyond® Acrylic Enamel	35
Sierra Performance™	MetalMax® DTM Acrylic Enamel	36
High Performance	ROCAlyd® Cold Galvanizing Compound 7000	37
High Performance	ROCAcrylic® Direct-to-Metal Acrylic Enamel 3800	38
High Performance	ROCEpoxy® High Solids Epoxy Primer HS9300	39
High Performance	ROCPriME® Water-Based Hybrid 1K Epoxy Primer	40
Sierra Performance™	S70 Water-Based Epoxy Primer	40
High Performance	ROCEpoxy® Direct-To-Metal Epoxy Mastic 9100	41
High Performance	ROCEpoxy® Direct-To-Metal Low Temperature Cure Epoxy 9200	42
High Performance	ROCEpoxy® Coal Tar Epoxy C9578	43
Sierra Performance™	S60 Water-Based Epoxy Maintenance Coating	44
High Performance	ROCThane® Fine Finish Urethane 9400	45
High Performance	ROCThane® Direct-To-Metal Urethane Mastic 9800	46
Professional Solutions	Solvents	47
Professional Solutions	Thinners	48
	Technical Data	49-50

CONCRETE PREP, PATCH & REPAIR		51
SYSTEM	DESCRIPTION	PAGE
TurboKrete®	Concrete Patching Compound	52
TurboKrete®	All-Purpose Epoxy Repair	52
Concrete Saver®	Flexible Joint Sealant	53
5499 System	Concrete Patching Compound	53
Instapatch®	Ultra Rapid Curing Repair	54
Putty Patch™	Concrete Repair	54
Concrete Saver®	Pourable Concrete Patching Compound	55
108	Cleaning & Etching Solution	55
S6511 System	Prime & Seal Primer	55
Concrete Saver®	Hard Surface Primer Water-Based Epoxy Primer	56
Hard Surface	Water-Based Epoxy Primer	56
Concrete Saver®	Water-Based Topside Vapor Barrier	57
Concrete Saver®	100% Solids Topside Vapor Barrier	57
	Technical Data	58

FLOOR COATINGS		59
SYSTEM	DESCRIPTION	PAGE
5600 System	Acrylic Urethane Floor Paint	60
6000 System	Water-Based Epoxy	60
High Performance	ROCEpoxy® Direct-To-Metal Epoxy Mastic 9100	61
8000S-FC	100% Solids Fast-Cure Epoxy	62
6700 System	Extended Pot Life Epoxy	63
5500 System	Acrylic Dustproof Floor Sealer	63
5800 System	Water-Based Urethane Floor Coating	64
EasyClear®	Epoxy Maintenance Floor Coating	64
AS5400 System	Anti-Slip One-Step Epoxy	65
AS6000 System	Anti-Slip Low Profile Epoxy	65
SafeStep®	Anti-Slip & Slip Resistant Products	65
FastKote®	Floor Coating	66
FastKote® UV	Polyurea Floor Coating	66
FinishKote™ 70	High Solids Polyaspartic Floor Coating	67
FinishKote™ 80	High Solids Polyaspartic Floor Coating	67
UltraWear 1K	Ultra High Performance Floor Coating	68
BuildKote	Polyurea Floor Coating Primer/Basecoat	68
	Additional Protective Coatings	69
	Technical Data	70

RUST-OLEUM PROFESSIONAL CLEANING SOLUTIONS		71
SYSTEM	DESCRIPTION	PAGE
CLEANING	Glass Cleaner	72
CLEANING	Neutral Floor Cleaner	72
CLEANING	Low Foam Floor Cleaner	72
CLEANING	Carpet Stain Remover	73
CLEANING	Cleaner Degreaser	73
CLEANING	General Purpose Cleaner	73
CLEANING	Multi Purpose Pressure Washer Concentrate	74
CLEANING	Hand Cleaner and Dispenser	74
CLEANING	Empty Trigger Spray Bottle	74

# Coatings Selection Guide

See Technical Data Sheets for detailed product information.

## MILD ENVIRONMENTS

Outdoor weathering, mild industrial fumes and normal humidity with mold and mildew conditions.

## MODERATE ENVIRONMENTS

Frequent fumes and spills of mild chemicals, occasional product spills, occasional chemical cleaning. Intermittent high humidity, moisture, mold and mildew conditions.

## SEVERE ENVIRONMENTS

Frequent fumes and spills of strong chemicals (acids, alkalis and solvents), high humidity and moisture conditions. Frequent product spills and frequent chemical cleaning.

METAL/STEEL APPLICATIONS				
	FEATURES	RECOMMENDED PRODUCT	PAGE	PRIMER
SEVERE	Direct-To-Metal; high build; excellent adhesion and hiding; low temp. cure; ultimate protection of metal.	<b>ROCThane Direct-To-Metal Urethane Mastic 9800</b>	46	<b>ROCEpoxy Direct-To-Metal Epoxy Mastic 9100</b>
	Super high-gloss finish; superior corrosion, chemical, impact and abrasion resistance; low temp. cure.	<b>ROCThane Fine Finish Urethane 9400</b>	45	<b>ROCEpoxy Direct-To-Metal Epoxy Mastic 9100</b>
	Direct-To-Metal; superior long-term solvent, chemical and abrasion resistance; maximum corrosion protection.	<b>ROCEpoxy Direct-To-Metal Epoxy Mastic 9100</b>	41	Self-priming
	A single-component, high-build, water-based acrylic elastomeric suitable for use with only minimal surface preparation.	<b>Noxyde®</b>	49	Self-priming
MODERATE	Direct-To-Metal; superior resistance to blistering and water spotting; applies in low temp./high humidity.	<b>ROCAcrylic Direct-to-Metal Acrylic Enamel 3800</b>	33	<b>Any ROCPrime product or direct to metal application</b>
	Low solvent odor, low VOC, low HAP; Direct-To-Metal; high performance; corrosion & humidity resistant.	<b>MetalMax® DTM Acrylic Urethane</b>	36	<b>Any ROCPrime product or direct to metal application</b>
	Protects metal from rust and corrosion; superior color and gloss retention; excellent hiding.	<b>ROCAIkyd Direct-To-Metal Alkyd Enamel 7400</b>	28	<b>Any ROCPrime product or direct to metal application</b>
MILD	VOC <340 g/l; protects metal from rust and corrosion; superior color and gloss retention; excellent hiding.	<b>ROCAIkyd Direct-To-Metal Alkyd Enamel V7400</b>	28	<b>Any ROCPrime product or direct to metal application</b>
	Protects metal from rust and corrosion, superior color and gloss retention, excellent hiding	<b>ROCAIkyd Direct-to-Metal Alkyd Enamel CV740</b>	28	<b>Any ROCPrime product or direct to metal application</b>
	Low solvent odor, low VOC, low HAP; attractive and durable; extremely versatile topcoat; interior or exterior use.	<b>Beyond™ Acrylic Enamel</b>	35	<b>Universal Acrylic Primer</b>

See each product's Technical Data Sheet for surface preparation and application instructions.

Coatings Selection Guide continued on following page.

# Coatings Selection Guide

## GALVANIZED/ALUMINUM APPLICATIONS

FEATURES		RECOMMENDED PRODUCT	PAGE	PRIMER
SEVERE	Direct-To-Metal; high build; excellent adhesion and hiding; low temp. cure; ultimate protection of metal.	<b>ROCThane Direct-To-Metal Urethane Mastic 9800</b>	<b>46</b>	<b>ROCEpoxy Direct-To-Metal Epoxy Mastic 9100</b>
	Direct-To-Metal; superior resistance to blistering and water spotting; applies in low temp./high humidity.	<b>ROCAcrylic Direct-to-Metal Acrylic Enamel 3800</b>	<b>33</b>	<b>Any ROCPrime product</b> or self priming
MODERATE	Low solvent odor, low VOC, low HAP; Direct-To-Metal; high performance; corrosion & humidity resistant.	<b>MetalMax® DTM Acrylic Enamel</b>	<b>36</b>	Self-priming, or <b>S70/71 Epoxy Primer</b> in extreme situations
	Low solvent odor, low VOC, low HAP; attractive and durable; extremely versatile product; interior or exterior use.	<b>Beyond™ Acrylic Enamel</b>	<b>35</b>	<b>ROCPrime Water-Based Hybrid 1K Epoxy Primer</b> or self-priming
MILD	95% pure zinc in dry film; maximum corrosion resistance; excellent adhesion.	<b>ROCAIkyd Cold Galvanizing Compound 7000</b>	<b>37</b>	Self-priming

## VEHICLE/MOBILE EQUIPMENT REFINISHING APPLICATIONS

SEV.	Super high-gloss finish; superior corrosion, chemical, impact and abrasion resistance; low temp. cure.	<b>ROCThane Fine Finish Urethane 9400</b>	<b>45</b>	<b>ROCEpoxy High Solids Epoxy Primer HS9300</b>
------	--	---	-----------	---

## CONCRETE/MASONRY APPLICATIONS

MOST SEVERE	<b>SEE CONCRETE PROTECTION SYSTEMS STARTING ON PAGE 86.</b>			
SEVERE	High build; excellent adhesion and hiding; low temp. cure.	<b>ROCThane Direct-To-Metal Urethane Mastic 9800</b>	<b>46</b>	<b>ROCEpoxy High Solids Epoxy Primer HS9300</b>
	Superior long-term solvent, chemical and abrasion resistance.	<b>ROCEpoxy Direct-To-Metal Epoxy Mastic 9100</b>	<b>41</b>	Self-priming
MODERATE	No solvent odor, low VOC, low HAP; excellent corrosion, chemical and stain resistance.	<b>S60 System – Epoxy Maintenance Coating</b>	<b>44</b>	Self-priming
	Resists blistering; low temp./high humidity application.	<b>ROCAcrylic Direct-to-Metal Acrylic Enamel 3800</b>	<b>33</b>	Self-priming

## FLOORING APPLICATIONS

FEATURES		RECOMMENDED PRODUCT	PAGE	PRIMER
<b>CONCRETE</b>				
MOST SEVERE	<b>SEE CONCRETE PROTECTION SYSTEMS STARTING ON PAGE 86.</b>			
SEVERE	2-3 times tougher than concrete; superior abrasion, impact and chemical resistance.	<b>6700 System – Extended Pot Life Epoxy</b>	<b>62</b>	Self-priming or <b>Penetrating Prime &amp; Seal™ Primer S6511413</b>
	Superior long-term solvent, chemical and abrasion resistance; resists light to moderate wheeled traffic.	<b>FastKote® – Polyurea Floor Coating</b>	<b>69</b>	Build Kote Self-priming or <b>Polyurea Floor Coating Primer</b>

See each product's Technical Data Sheet for surface preparation and application instructions.

## FLOORING APPLICATIONS (continued)

	FEATURES	RECOMMENDED PRODUCT	PAGE	PRIMER
<b>CONCRETE</b>				
SEVERE	2-3 times tougher than concrete; superior abrasion, impact and chemical resistance.	<b>FastKote® UV – UV Stable Polyurea Floor Coating</b>	69	Self-priming or <b>Penetrating Prime &amp; Seal™ Primer S6511413</b>
	Superior long-term solvent, chemical and abrasion resistance; resists light to moderate wheeled traffic.	<b>ROCEpoxy Direct-To-Metal Epoxy Mastic 9100</b>	41	Self-priming
MODERATE	Resists heavy foot traffic and lightweight rubber tire vehicle traffic; withstands intermittent mild chemical spills.	<b>6000 System – Water-Based Epoxy</b>	60	Self-priming
	For interior concrete floors. Protects new or old concrete or previously coated floors.	<b>EasyClear® – Epoxy Maintenance Floor Coating</b>	64	Self-priming
MILD	Low odor, resists lightweight rubber wheel traffic, mild stains, mildew and eliminates dusting.	<b>5600 System – Acrylic Urethane Floor Paint</b>	60	Self-priming
	Low odor, UV resistant, satin finish; resists light traffic, mild stains and eliminates dusting.	<b>5500 System – Acrylic Dustproofer Floor Sealer</b>	63	Self-priming
<b>STEEL DECK</b>				
SEV.	Direct-To-Metal; superior long-term solvent, chemical and abrasion resistance; maximum corrosion protection.	<b>ROCEpoxy Direct-To-Metal Epoxy Mastic 9100</b>	41	Self-priming
<b>ANTI-SLIP</b>				
SEVERE	For continuous vehicle and equipment traffic; strong chemical exposure.	<b>AS6500 System – Anti-Slip 100% Solids Epoxy</b>	67	Self-priming
	For heavy vehicle and equipment traffic; strong chemical exposure.	<b>AS9100 System – Anti-Slip High Performance Epoxy</b>	67	Self-priming
MOD.	For heavy foot traffic and/or light vehicle traffic.	<b>AS5400 System – Anti-Slip One-Step Epoxy</b>	66	Self-priming
MILD	For barefoot and light recreational pedestrian traffic; low odor.	<b>AS6000 System – Anti-Slip Low-Profile Epoxy</b>	66	Self-priming
	For mild industrial environments; fast dry, low odor	<b>AS5600 System – Anti-Slip Low-Medium Profile Acrylic</b>	65	Self-priming

## WATER-IMMERSION ENVIRONMENTS

SEVERE	Apply above 60°F (15°C). Not recommended for potable water tanks. Use with 9102402.	<b>ROCEpoxy Direct-To-Metal Epoxy Mastic 9100</b>	41	Self-priming
	Protects against severe abrasion, strong chemicals and non-potable water immersion.	<b>ROCEpoxy Coal Tar Epoxy C9578</b>	43	Self-priming
	Tank of 3,000 gallons minimum.	<b>ROCEpoxy 9200 - Potable Water System</b>	42	Self-priming

## WALLS, DOORWAYS, TRIM

MODERATE	No solvent odor, low VOC, low HAP; high durability epoxy for use in extreme areas.	<b>S60 System – Epoxy Maintenance Coating</b>	44	<b>S70/S71 System Epoxy Primer</b>
	No solvent odor, low VOC, low HAP; attractive; durable; extremely versatile; interior or exterior use.	<b>Beyond™ Acrylic Enamel</b>	35	<b>Universal Acrylic Primer or Self Priming</b>
	Durable, abrasion resistant water-based coating for interior and exterior use	<b>The MULE</b>	38	<b>Universal Acrylic Primer</b>

## LIVESTOCK FACILITIES

MODERATE	No solvent odor, low VOC, low HAP; high durability epoxy for use in extreme areas.	<b>S60 System – Epoxy Maintenance Coating</b>	44	<b>S70/S71 System Epoxy Primer</b>
	No solvent odor, low VOC, low HAP; attractive; durable; extremely versatile; interior or exterior use.	<b>Beyond™ Acrylic Enamel</b>	35	<b>Universal Acrylic Primer</b>

See each product's Technical Data Sheet for surface preparation and application instructions.

# Coatings Chemical & Corrosion Resistance

**● EXCELLENT RESISTANCE**

The color and film integrity of the coating is generally unaffected by exposure to this condition. Long-term protection can be expected.

**▲ GOOD RESISTANCE**

The film integrity of the coating is generally unaffected by exposure to this condition. Color and gloss may be slightly affected with longer exposure; however, long-term protection can be expected.

**◆ FAIR RESISTANCE**

The film integrity of the coating is generally unaffected by exposure to this condition, however color and gloss will be affected with longer exposure.

**■ NOT RECOMMENDED**

Film integrity and color are affected by exposure to this condition, greatly reducing protection.

<b>CHEMICAL &amp; CORROSION RESISTANCE GUIDE</b>																				
This chart represents the general chemical resistance of Rust-Oleum finish coats. For more details, call the Rust-Oleum Technical Service Department at 847-816-2248.	CORROSIVE CONDITIONS							FUMES, SPILLAGE & SPRAYS										IMMERSION CONTINUOUS WET HEAT RESISTANCE 125°F (52°C)		
	GENERAL WEATHERING	INDUSTRIAL FUMES	SALT ATMOSPHERE	MOLD, MILDEW, FUNGUS	LIGHT-MODERATE ABRASION	HEAVY ABRASION	DRY HEAT	WATER	SALT & BRINES	MILD ALKALI, SOAPS & DETERGENTS	STRONG ALKALI & CAUSTICS	MILD, DILUTE ACIDS	STRONG, CONCENTRATED ACIDS	FOOD ACIDS	GREASES, OILS & FATS	GASOLINE & SOLVENTS	CUTTING OILS, COOLANT & HYDRAULIC FLUID	FRESH WATER	SALT WATER & BRINE	SEWAGE
	<b>HIGH PERFORMANCE</b>																			
<b>ROCAIkyd® Direct-To-Metal Alkyd Enamel 7400/V7400/CV740</b>	▲	●	●	■	▲	■	212°F 100°C	▲	▲	▲	■	▲	■	▲	●	▲	▲	■	■	■
<b>ROCAcrylic® Direct-to-Metal Acrylic Enamel 3800</b>	●	●	●	●	▲	■	200°F 93°C	▲	●	▲	■	▲	■	▲	●	■	▲	■	■	■
<b>ROCEpoxy® Direct-To-Metal Epoxy Mastic 9100</b>	◆	●	●	●	●	●	300°F 149°C	●	●	●	●	●	●	▲	●	●	●	● <sup>1</sup>	● <sup>1</sup>	● <sup>1</sup>
<b>ROCEpoxy® Coal Tar Epoxy C9578</b>	◆	●	●	●	●	●	300°F 149°C	●	●	●	●	●	▲	●	●	●	●	●	●	●
<b>ROCEpoxy® Direct-To-Metal Low Temperature Cure Epoxy 9200</b>	◆	●	●	●	●	●	300°F 149°C	●	●	●	●	●	▲	●	●	●	●	●	●	●
<b>ROCThane® Direct-To-Metal Urethane Mastic 9800</b>	●	●	●	●	●	●	300°F 149°C	●	●	●	●	▲	◆	◆	●	◆	▲	■	■	■
<b>ROCThane® Fine Finish Urethane 9400</b>	●	●	●	●	●	●	300°F 149°C	●	●	●	●	●	▲ <sup>2</sup>	●	●	●	▲	■	■	■
<b>ROCAIkyd® Cold Galvanizing Compound 7000</b>	●	●	●	■	▲	■	350°F 177°C	▲	▲	▲	■	■	■	▲	●	▲	▲	■	■	■







<sup>1</sup> Use with 9102402 Immersion Activator. <sup>2</sup> Long-term exposure to acids may cause some discoloration.





# Coatings Chemical & Corrosion Resistance

CHEMICAL & CORROSION RESISTANCE GUIDE																				
This chart represents the general chemical resistance of Rust-Oleum finish coats. For more details, call the Rust-Oleum Technical Service Department at 847-816-2248.	CORROSIVE CONDITIONS							FUMES, SPILLAGE & SPRAYS										IMMERSION CONTINUOUS WET HEAT RESISTANCE 125°F (52°C)		
	GENERAL WEATHERING	INDUSTRIAL FUMES	SALT ATMOSPHERE	MOLD, MILDEW, FUNGUS	LIGHT-MODERATE ABRASION	HEAVY ABRASION	DRY HEAT	WATER	SALT & BRINES	MILD ALKALI, SOAPS & DETERGENTS	STRONG ALKALI & CAUSTICS	MILD, DILUTE ACIDS	STRONG, CONCENTRATED ACIDS	FOOD ACIDS	GREASES, OILS & FATS	GASOLINE & SOLVENTS	CUTTING OILS, COOLANT & HYDRAULIC FLUID	FRESH WATER	SALT WATER & BRINE	SEWAGE
	<b>NOXYDE ELASTOMERIC ACRYLIC COATING</b>																			
Noxyde® Elastomeric Acrylic Coating	●	●	●	●	●	▲	225°F 107°C	●	●	▲	◆	▲	▲	▲	◆	◆	◆	■	■	■
<b>SIERRA PERFORMANCE™</b>																				
Beyond™ Acrylic Enamel	●	●	●	●	●	■	—	▲	▲	●	■	▲	■	▲	▲	■	■	■	■	■
MetalMax® DTM Acrylic Enamel	●	●	●	●	●	■	—	●	●	●	▲	▲	▲	▲	▲	▲	▲	■	■	■
S60 System – Epoxy Maintenance Coating	▲	●	●	●	●	▲	—	●	●	●	▲	●	▲	●	●	▲	▲	■	■	■
<b>SafeTex®</b>																				
AS6000 System – Anti-Slip Low-Profile Epoxy	◆	●	●	▲	●	●	—	●	●	●	●	●	■	●	▲	▲	▲	▲	■	■
AS5400 System – Anti-Slip One-Step Epoxy	▲	●	▲	▲	●	●	—	●	●	●	●	●	■	●	●	●	●	■	■	■
AS9100 System – Anti-Slip High Performance Epoxy	◆	●	●	▲	●	●	—	●	●	●	●	●	▲	▲	▲	▲	▲	■	■	■
AS6500 System – Anti-Slip 100% Solids Epoxy	◆	●	●	▲	●	●	—	●	●	●	●	●	▲	▲	▲	▲	▲	■	■	■
<b>CONCRETE SAVER®</b>																				
ROCEpoxy® Direct-To-Metal Epoxy Mastic 9100	▲	▲	▲	▲	●	■	—	●	●	●	▲	▲	▲	▲	●	▲	▲	■	■	■
5500 System – Acrylic Dustproofer Floor Sealer	●	▲	●	●	▲	■	200°F 93°C	●	▲	▲	■	▲	■	◆	▲	■	■	■	■	■
5600 System – Acrylic Urethane Floor Paint	●	▲	●	●	▲	■	200°F 93°C	▲	▲	▲	■	▲	■	▲	●	■	◆	■	■	■
6000 System – Water-Based Epoxy	◆	●	●	▲	●	▲	—	●	●	●	●	●	■	●	●	●	●	■	■	■
EasyClear® – Epoxy Maintenance Floor Coating	◆	●	●	●	●	●	300°F 149°C	●	●	●	●	●	▲	●	●	●	●	▲	▲	▲
6700 System – Extended Pot Life Epoxy	▲	●	●	●	●	●	—	●	●	●	●	●	▲	●	●	●	●	■	■	■
TurboKrete® Concrete Patching Compound	▲	●	●	●	●	●	200°F 93°C	●	●	●	●	▲	◆	●	●	▲	●	●	●	▲

Concrete Saver offers protection for the most severe industrial environment. Ask your Rust-Oleum Sales Representative for a complete Concrete Saver Chemical & Corrosion Resistance Guide.

# Color Coding Identification Guides

<b>SAFETY COLOR CODING GUIDE</b>		
Based on the original OSHA code.		
	<b>EMERGENCY</b>	Use <b>RED</b> for the identification of fire protection equipment and apparatus, danger and stop.
	<b>WARNING</b>	Use <b>ORANGE</b> for designating dangerous parts of machines or energized equipment which may cut, crush, shock, or otherwise injure, and to emphasize such hazards when enclosure doors are open or removed, or when gear, belt or other guards around moving equipment are open or removed, exposing unguarded hazards.
	<b>CAUTION</b>	Use <b>YELLOW</b> for designating caution and for marking physical hazards such as striking against, stumbling, falling, tripping and "caught in between". Solid yellow, and yellow with black stripes or checkers should be used interchangeably, using the combination which will attract the most attention in the particular area.
	<b>SAFETY EQUIPMENT</b>	Use <b>GREEN</b> or similar color for designating safety and the location of First Aid equipment (other than firefighting equipment). Green background with a white cross is accepted as identifying First Aid equipment.
	<b>SAFETY INFORMATION</b>	Use <b>BLUE</b> for identification of safety information used on informational signs and bulletin boards. In railroad areas only, blue shall be the color for designating caution, limited to warning against the starting, the use of, or the movement of equipment under repair or being worked on.
	<b>TRAFFIC/ HOUSEKEEPING</b>	Use <b>BLACK &amp; WHITE</b> to designate traffic and housekeeping markings. Solid white, solid black, single color striping, alternate stripes of black and white or black and white checkers should be used in accordance with local conditions. (Purple, gray and brown may be used to accentuate color contrast and make other colors more visible.)

<b>IDENTIFICATION OF PIPING SYSTEMS</b>		
Complies with the American National Standards Institute ANSI A13.1-1981 recommendations.		
	<b>FIRE PROTECTION &amp; SPRINKLER PIPING</b>	<b>RED</b> is for ANSI Class F-FIRE. This classification includes sprinkler systems and other fire protection equipment.
	<b>DANGEROUS MATERIALS</b>	<b>YELLOW</b> is for ANSI Class D. This group includes materials which are hazardous to life or property because they are easily ignited, toxic, corrosive at high temperatures and pressures, produce poisonous gas or are themselves poisonous.
	<b>SAFE MATERIALS</b>	<b>GREEN</b> is for ANSI Class S. This group includes those materials involving little or no hazard to life or property in their handling.
	<b>PROTECTIVE MATERIALS</b>	<b>BLUE</b> is for ANSI Class P. This group includes materials which are piped through plants for the express purpose of being able to prevent or minimize the hazard of dangerous materials.

<b>APWA UNIFORM COLOR CODE</b>	
<b>YELLOW</b>	Gas, oil, steam, petroleum, gaseous materials
<b>RED</b>	Electric power lines, cables, conduit, lighting cables
<b>PURPLE</b>	Reclaimed water, irrigation, slurry lines
<b>BLUE</b>	Potable water
<b>GREEN</b>	Sewers and drain lines
<b>WHITE</b>	Proposed excavation
<b>PINK</b>	Temporary survey markings
<b>ORANGE</b>	Communication, alarm/signal lines, cables, conduit



## RUST-OLEUM SPRAY PAINT

Nobody knows spray paint like Rust-Oleum. From applications where just a simple touch up or color change is needed to long-term rust protection on metal, Rust-Oleum has it all. Our products are designed for maximum coverage, durability, ease of use and comfort so painting is fast and easy with professional results every time.



View all of our  
High Performance  
Spray Paints online

# Spray Paint



## V2100 SYSTEM HARD HAT RUST-PREVENTIVE ENAMEL

The ultimate spray paint for industrial applications. Provides maximum corrosion protection and long-lasting durability.

Features	For Use On
High paint solids provide excellent coverage in one coat	<ul style="list-style-type: none"> <li>Structural steel</li> </ul>
High output tip covers 50% faster, requiring less downtime	<ul style="list-style-type: none"> <li>Handrails</li> </ul>
Dries fast – 20 minutes to touch	<ul style="list-style-type: none"> <li>Piping &amp; storage tanks</li> </ul>
Tough, professional finish provides superior resistance to chipping, cracking and peeling	<ul style="list-style-type: none"> <li>Equipment &amp; machinery</li> </ul>
Can be used on surfaces that reach temperatures up to 200°F	
Meets USDA requirements for incidental food contact	
360° any angle spray allows use in any orientation, up, down and sideways	
Available in a hammered finish to conceal flaws on scratched, rusted or pitted metal	

### COLORS (15 OZ.)

<b>V2170838</b> Almond	<b>V2147838</b> Industrial Yellow	<b>V2179838</b> Gloss Black
<b>V2171838</b> Tan	<b>V2164838</b> Bright Red	<b>V2177838</b> Semi-Gloss Black
<b>V2175838</b> Chestnut Brown	<b>V2187838</b> Dark Machine Gray	<b>V2178838</b> Flat Black
<b>V2125838</b> Deep Blue	<b>V2184838</b> Dove Gray	<b>V2192838</b> Gloss White
<b>V2123838</b> Light Blue	<b>V2183838</b> Light Machine Gray	<b>209567</b> Semi-Gloss White
<b>V2137838</b> Dark Green	<b>V2188838</b> Smoke Gray	<b>V2190838</b> Flat White
<b>V2134838</b> Bright Green	<b>V2115838</b> Silver Aluminum (14 oz.)	<b>V2196838</b> Fleet White
<b>V2138838</b> Hunter Green	<b>V2119838</b> Stainless Steel (14 oz.)	<b>V2102838</b> Crystal Clear (14 oz.)

### SAFETY COLORS (15 OZ.)

<b>V2124838</b> Safety Blue	<b>V2167838</b> Safety Purple	<b>V2143838</b> Safety Yellow
<b>V2155838</b> Safety Orange	<b>V2163838</b> Safety Red	<b>V2133838</b> Safety Green

### FLUORESCENTS (14 OZ.)

<b>2233838</b> Fluorescent Green	<b>2255838</b> Fluorescent Orange	<b>2242838</b> Fluorescent Yellow
----------------------------------	-----------------------------------	-----------------------------------

### EQUIPMENT

<b>209713</b> JD Green	<b>209717</b> International Harvester Red	<b>V2156838</b> Equipment Orange
<b>209714</b> JD Yellow	<b>209718</b> Ford Blue	
<b>209715</b> Caterpillar Yellow (old)	<b>V2148838</b> Equipment Yellow	


### COMPANION PRODUCTS

<b>243546</b> Spray Grip	<b>241526</b> Comfort Grip
--------------------------	----------------------------

### APPLICATION



### SUBSTRATES



## V2100 SYSTEM ENAMEL PRIMER

Fast-drying primer adds twice the protection and enhances the appearance of the topcoat.

Features	For Use On
Can be topcoated any time	<ul style="list-style-type: none"> <li>Structural steel</li> </ul>
Use anywhere extra protection is needed on rusted, bare or previously painted metal	<ul style="list-style-type: none"> <li>Handrails</li> </ul>
Better corrosion protection than other industrial rust-preventive aerosol primers	<ul style="list-style-type: none"> <li>Piping &amp; storage tanks</li> </ul>
Meets USDA requirements for incidental food contact	<ul style="list-style-type: none"> <li>Equipment &amp; machinery</li> </ul>

### COLORS (15 OZ.)

<b>V2169838</b> Red Primer
<b>V2182838</b> Gray Primer
<b>209566</b> White Clean Metal Primer


### COMPANION PRODUCTS

<b>243546</b> Spray Grip
<b>241526</b> Comfort Grip

### APPLICATION



### SUBSTRATES





## 1600 SYSTEM MULTI-PURPOSE ENAMEL


From Rust-Oleum, the most trusted name in spray paint, Industrial Choice is a multi-purpose spray paint developed for everyday industrial maintenance applications.

Features	For Use On
Ultra coverage formula provides maximum coverage - paints more area faster using fewer cans!	<ul style="list-style-type: none"> <li>• Tools and motors</li> <li>• Furniture</li> <li>• Equipment and color coding</li> <li>• Ladders &amp; lockers</li> </ul>
360° any angle spray allows you to spray in any direction	
Comfort tip reduces finger fatigue	
Dries to touch in only 12 minutes	
High solids formula delivers complete, even coverage	
Protects against chipping, cracking and peeling	
Can be used on surfaces that reach temperatures up to 200°F	
Meets USDA requirements for incidental food contact	

### APPLICATION



### SUBSTRATES



### COLORS (12 OZ.)

<b>1672830</b> Almond	<b>1643830</b> School Bus Yellow	<b>1614830V</b> Dull Aluminum
<b>1671830</b> Beige	<b>202216</b> Dusty Pink	<b>1676830</b> Ultra-Flat Black
<b>1674830</b> Leather Brown	<b>1666830</b> Banner Red	<b>1678830</b> Semi-Flat Black
<b>257399</b> Gloss Purple	<b>1664830V</b> Cherry Red	<b>1679830V</b> Glossy Black
<b>1626830V</b> True Blue	<b>1686830V</b> Universal Gray	<b>1692830V</b> Glossy White
<b>1622830V</b> Regal Blue	<b>1684830</b> Dove Gray	<b>1690830V</b> Flat White
<b>1638830</b> Hunter Green	<b>1688830</b> Smoke Gray	<b>257402V</b> Semi-Gloss White
<b>202211</b> Machinery Green	<b>202214</b> Machinery Gray	<b>1696830</b> Antique White
<b>257401V</b> Emerald Green	<b>244305</b> Bright Galvanizing Compound	<b>1610830</b> Crystal Clear

### SAFETY COLORS (12 OZ.)

<b>1624830</b> Safety Blue	<b>1653830V</b> Safety Orange	<b>1660830</b> Safety Red
<b>1633830</b> Safety Green	<b>1670830</b> Safety Purple	<b>1644830</b> Safety Yellow

### FLUORESCENTS (12 OZ.)

<b>1632830</b> Fluorescent Green	<b>1655830</b> Fluorescent Red-Orange	<b>1642830</b> Fluorescent Yellow
<b>1654830</b> Fluorescent Orange	<b>1659830</b> Fluorescent Pink	

### ANSI COLORS (12 OZ.)

<b>214645</b> ANSI 61 Light Gray	<b>214646</b> ANSI 49 Medium Light Gray	<b>214647</b> ANSI 70 Light Gray
----------------------------------	---	----------------------------------

### PRIMERS

<b>1667830</b> Red Primer	<b>1681830V</b> White Primer
<b>1680830V</b> Gray Primer	<b>257400</b> Black Primer

### COMPANION PRODUCTS

<b>243546</b> Spray Grip	<b>241526</b> Comfort Grip
--------------------------	----------------------------



**SPRAY GRIP**



**COMFORT GRIP**

# Spray Paint



## V2100 SYSTEM GALVANIZING COMPOUND

Zinc-rich coatings contain up to 93% pure zinc to provide maximum corrosion protection through galvanic protection.

Features	For Use On
Excellent adhesion to galvanized metal	<ul style="list-style-type: none"> <li>• Damaged galvanized steel</li> <li>• Production welds</li> <li>• Fences &amp; bridges</li> <li>• Tanks &amp; utility towers and more</li> <li>• Vehicles &amp; trailers</li> </ul>
Dries fast — 20 minutes to touch	
Maximum corrosion protection ideal for use in moderate to severe environments	
Meets the performance requirements of Federal Specifications DOD-P-21035A; MIL-P-26915C	
Can be used on surfaces that reach temperatures up to 200°F	
Meets USDA requirements for incidental food contact	

### COLORS (20 OZ.)

**V2185838** Cold Galvanizing Compound  
**V2117838** Bright Galvanizing Compound

### COMPANION PRODUCTS

**243546** Spray Grip  
**241526** Comfort Grip

### APPLICATION



### SUBSTRATES



## V2100 SYSTEM HIGH HEAT COATING

Heat-resistant coating for objects that reach temperatures up to 1000°F.

Features	For Use On
Direct-to-metal (DTM) spray protects against corrosion	<ul style="list-style-type: none"> <li>• Boilers &amp; steam pipes</li> <li>• Vents &amp; exhaust pipes</li> <li>• Kilns</li> </ul>
Dries fast — 20 minutes to touch	
Durable, long-lasting finish	
Meets USDA requirements for incidental food contact	

### COLORS (15 OZ.)

**V2116838** High Heat Aluminum  
**V2176838** High Heat Black

### COMPANION PRODUCTS

**243546** Spray Grip  
**241526** Comfort Grip

### APPLICATION



### SUBSTRATES



## V2100 SYSTEM RUST REFORMER®

Convenient aerosol rust-converter instantly stops existing and future corrosion in one step.

Features	For Use On
Neutralizes rust and prevents it from coming back	<ul style="list-style-type: none"> <li>• Hard to reach areas and minimal surface prep projects</li> <li>• Complex shapes</li> <li>• Equipment</li> <li>• Railings</li> </ul>
Dries fast — 12 minutes to touch	
Dries to a hard, flat-black finish that can be topcoated with oil or latex coatings	
Protects against corrosion better than other rust converters on the market	
Can be used on surfaces that reach temperatures up to 200°F	
Meets USDA requirements for incidental food contact	

### COLORS (15 OZ.)

**215634** Rust Reformer

### COMPANION PRODUCTS

**243546** Spray Grip  
**241526** Comfort Grip

### APPLICATION



### SUBSTRATES





## VK9300 SYSTEM TWO-COMPONENT EPOXY PRIMER

Two-component (2K) Epoxy Primer contains the base and activator in one can to give true epoxy corrosion protection with easy, no mess aerosol convenience.

Features	For Use On
Enhances the performance of any topcoat in mild to severe environments	<ul style="list-style-type: none"> <li>• Hard to reach areas like welds, seams, bolts &amp; edges</li> <li>• Machinery</li> <li>• Fleet maintenance</li> <li>• Pipelines and more</li> </ul>
Easy activation with innovative 2K technology	
Fast direct-to-metal (DTM), sound rust and previously coated surface application	
Extended pot life for 4 days after activation	
Exceptional chemical and corrosion resistance	
Meets USDA requirements for incidental food contact	

### COLORS

**247597** Gray (12.7 OZ.)  
**247598** Beige (12.7 OZ.)


### COMPANION PRODUCTS

**243546** Spray Grip  
**241526** Comfort Grip

### APPLICATION



### SUBSTRATES



## UTILI-T™

Aerosol coating that is a quick, cost-effective solution for painting or marking items with reliable performance.

Features	For Use On
Durable, uniform finish that applies quickly, delivers a fine finish and can be rapidly recoated	<ul style="list-style-type: none"> <li>• Wrapped pallets</li> <li>• Shipping crates,</li> <li>• Lockers and railings</li> <li>• Parking lot bollards and more</li> </ul>
Facilitates easy recoating	
Provides protection and enhances visual appeal with minimal effort	

### COLORS (10 OZ.)

**387389** Flat Black  
**387390** Gloss Black  
**387391** Gloss Red  
**387392** Gloss Yellow  
**387393** Gloss Green  
**387394** Gloss Blue  
**387395** Gloss White  
**387396** Aluminum  
**387397** Gray Primer  
**387398** Gloss Orange  
**387399** Flat White  
**387400** Gloss Dark Gray


### COMPANION PRODUCTS

**243546** Spray Grip  
**241526** Comfort Grip

### APPLICATION



### SUBSTRATES



# Spray Paint



## 1600 SYSTEM GALVANIZING COMPOUND

Zinc-rich coating contains a high zinc content for excellent galvanic protection.

Features	For Use On
Excellent adhesion to galvanized metal	<ul style="list-style-type: none"> <li>• Damaged galvanized steel</li> <li>• Production welds</li> <li>• Fences and bridges</li> <li>• Tanks, utility towers and more</li> <li>• Vehicles and trailers</li> <li>• Touch-up and repair</li> </ul>
Dries fast — 20 minutes to touch	
Meets the performance requirements of Federal Specifications DOD-P-21035A; MIL-P-26915C	
Can be used on surfaces that reach temperatures up to 200°F	
Meets USDA requirements for incidental food contact	


### COLORS (14 OZ.)

- 1685830** Cold Galvanizing Compound
- 244305** Bright Galvanizing Compound

### COMPANION PRODUCTS

- 243546** Spray Grip
- 241526** Comfort Grip

### APPLICATION



### SUBSTRATES



## RB1600 SYSTEM GREEN REBAR EPOXY

Designed for the touch-up of rebar coating on the job site.

Features	For Use On
Prevents rust and metal rust stains on concrete	<ul style="list-style-type: none"> <li>• Rebar</li> </ul>
Excellent corrosion and chemical resistance	
Dries fast — 15 minutes to touch	

### COLORS (12 OZ.)

- 261937** Green Rebar

### COMPANION PRODUCTS

- 243546** Spray Grip
- 241526** Comfort Grip

### APPLICATION



### SUBSTRATES



# STRIPING & MARKING PAINT



## RUST-OLEUM STRIPING & MARKING PAINT

Rust-Oleum offers a vast assortment of striping and marking paints for any job. From precision markings for utility locating to bold markings for a construction job, our marking paint selection is the most complete in the industry. When it comes to striping parking lots, athletic fields or walkways, our collection of trusted striping paints go the distance with long-lasting results you can count on every time.



# Striping & Marking Paint




## M1600/M1800 SYSTEM PRECISION LINE® INVERTED MARKING PAINT


Water and solvent-based marking paints feature a precision-line spray tip for easy-to-read, bright, vivid markings for utility, construction, excavation, surveying, landscape and golf course markings.

Features	For Use On
Best resistance against premature fading	<ul style="list-style-type: none"> <li>• Utility and construction</li> </ul>
Precision spray tip	<ul style="list-style-type: none"> <li>• Excavation</li> </ul>
Marks more linear feet per can than other brands	<ul style="list-style-type: none"> <li>• Surveying and landscape</li> </ul>
No mess spray tip keeps paint off fingers	<ul style="list-style-type: none"> <li>• Golf course markings</li> </ul>
Locking tip does not pop off	
Virtually no overspray	
Dries fast — less than 5 minutes	
Convenient spray-through cap	
Guaranteed not to clog	

### APPLICATION



### SUBSTRATES



AND MORE!



### TOTAL LINEAR FEET COMPARISON



### APWA UNIFORM COLOR CODE

<b>YELLOW</b>	Gas, oil, steam, petroleum, gaseous materials
<b>RED</b>	Electric power lines, cables, conduit, lighting cables
<b>PURPLE</b>	Reclaimed water, irrigation, slurry lines
<b>BLUE</b>	Potable water
<b>GREEN</b>	Sewers and drain lines
<b>WHITE</b>	Proposed excavation
<b>PINK</b>	Temporary survey markings
<b>ORANGE</b>	Communication, alarm/signal lines, cables, conduit

### M1600 SOLVENT-BASED COLORS (17 OZ.)

<b>203022V</b>	APWA / Caution Blue	<b>203030V</b>	White	<b>1662838V</b>	Fluorescent Red
<b>203024V</b>	Caution Yellow	<b>1601838V</b>	Clear	<b>203028V</b>	Fluorescent Red-Orange
<b>203025V</b>	High Visibility Yellow	<b>239007</b>	Silver (16 oz.)	<b>203023V</b>	Fluorescent Green
<b>203026V</b>	Alert Orange	<b>1634838V</b>	APWA / Safety Green	<b>203027V</b>	Fluorescent Orange
<b>201516V</b>	APWA Orange	<b>203029V</b>	Safety Red	<b>1661838V</b>	Fluorescent Pink
<b>1675838V</b>	Black	<b>1669838V</b>	Fluorescent Purple		

### M1800 WATER-BASED COLORS (17 OZ.)

<b>203031</b>	APWA / Caution Blue	<b>1868838</b>	Safety Purple	<b>1862838</b>	Fluorescent Red
<b>203033</b>	Caution Yellow	<b>1875838</b>	Black	<b>203037</b>	Fluorescent Red-Orange
<b>203034</b>	High Visibility Yellow	<b>203039</b>	White	<b>203032</b>	Fluorescent Green
<b>203035</b>	APWA / Alert Orange	<b>1801838</b>	Clear (16 oz.)	<b>203036</b>	Fluorescent Orange
<b>1834838</b>	APWA / Safety Green	<b>205176</b>	Fluorescent Blue	<b>1861838</b>	Fluorescent Pink
<b>203038</b>	Safety Red	<b>1869838</b>	Fluorescent Purple		

### SAFETY COLORS (17 OZ.)

<b>1834838</b>	APWA / Safety Green	<b>1868838</b>	Safety Purple	<b>203038</b>	Safety Red
----------------	---------------------	----------------	---------------	---------------	------------

### COMPANION PRODUCTS

<b>268476</b>	Marking Wand with flag holder	<b>210188</b>	Marking Pistol	<b>2388000</b>	Striping Wand
---------------	-------------------------------	---------------	----------------	----------------	---------------

# Striping & Marking Paint




## M1400 SYSTEM CONSTRUCTION MARKING PAINT


The only marking paint needed for any job or landscape applicator.

Features	For Use On
Bold, easy to see markings for excellent visibility	<ul style="list-style-type: none"> <li>• Utility and construction</li> <li>• Excavation and surveying</li> <li>• Landscape and golf course markings</li> </ul>
Excellent visibility on concrete, dirt, gravel, grass, wood, dirt, gravel, grass, pavement and more	
Best resistance against early fading and chalking	
Non-clogging, inverted spray tip won't pop off	
Water-based formula. Formulated for application in temperatures as low as 25°F (-3°C)	

### APPLICATION



### SUBSTRATES



AND MORE!



### WATER-BASED COLORS (17 OZ.)

<b>264693</b>	Clear	<b>264702</b>	Fluorescent Pink	<b>264695</b>	High Visibility Yellow
<b>264692</b>	White	<b>264699</b>	Fluorescent Red-Orange	<b>264696</b>	Safety Red
<b>359824</b>	Black	<b>264700</b>	Fluorescent Green	<b>314062</b>	Safety Green
<b>264697</b>	Fluorescent Orange	<b>264694</b>	Caution Blue	<b>316312</b>	Safety Purple

### COMPANION PRODUCTS

<b>268476</b>	Marking Wand
<b>210188</b>	Marking Pistol



# Striping & Marking Paint



## 2300 SYSTEM INVERTED STRIPING PAINT

Solvent-based inverted striping paint for durable and bright, long-lasting lines.

Features	For Use On
Highest solids for complete coverage	<ul style="list-style-type: none"> <li>Aisles and lift truck routes</li> <li>Pallet positions and hazardous areas</li> </ul>
Dries fast — less than 10 minutes	<ul style="list-style-type: none"> <li>Commercial parking lots and playgrounds</li> <li>Stadiums and athletic facilities</li> </ul>
Guaranteed not to clog	
Use with Striping Machine or Striping Wand	

### COLORS (18 OZ.)

<b>2326838</b>	Blue	<b>2391838V</b>	White
<b>2348838V</b>	Yellow	<b>362971</b>	Safety Green
<b>2364838</b>	Red	<b>362972</b>	Safety Orange
<b>2378838</b>	Black		


### COMPANION PRODUCTS

<b>2395000</b>	Striping Machine	<b>2388000</b>	Striping Wand
----------------	------------------	----------------	---------------

### APPLICATION



### SUBSTRATES



AND MORE!



## TRAFFIC AND ZONE STRIPING PAINT

Traffic and Zone Striping Paint is a durable water-based acrylic coating for line striping and zone marking asphalt, concrete, gravel and more. It can be used inside or outside for parking lots, curbs, loading and unloading zones in any facility, from a commercial property's loading zone to a stadium's parking lot.

Features	For Use On
Produces durable, vivid, long-lasting stripes and markings	<ul style="list-style-type: none"> <li>Parking lots</li> <li>Stadiums</li> <li>Curbs</li> <li>Athletic facilities</li> </ul>
Paints up to 690 feet of a 4-inch line per gallon	
Water-Based formula that can be brushed, rolled or sprayed	
Dries to the touch in 30 minutes	
Available in flat and semi-gloss finishes in gallons and five-gallon pails	
MPI #97 certified	

### COLORS (FLAT)

<b>2326402</b>	Traffic Blue	<b>2391402</b>	Traffic White
<b>2348402</b>	Traffic Yellow	<b>2348300</b>	Traffic Yellow (5 Gal.)
<b>243276</b>	Traffic Red	<b>2391300</b>	Traffic White (5 Gal.)
<b>246774</b>	Traffic Black	<b>391995</b>	Traffic Black (5 Gal.)


### COLORS (SEMI-GLOSS)

<b>283900</b>	Traffic Blue	<b>283903</b>	Traffic White
<b>283902</b>	Traffic Yellow	<b>283907</b>	Bike Lane Green
<b>283868</b>	Traffic Red	<b>202475</b>	Traffic Yellow (5 Gal.)
<b>283906</b>	Traffic Black	<b>202357</b>	Traffic White (5 Gal.)

### APPLICATION



### SUBSTRATES



AND MORE!



# Striping & Marking Paint



## S1600 SYSTEM INVERTED STRIPING PAINT

Solvent-based inverted striping paint for crisp, long-lasting lines for use in athletic facilities, stadiums, parking lots and more.

Features	For Use On
Dries fast — less than 10 minutes	<ul style="list-style-type: none"> <li>• Parking lots and school grounds</li> <li>• Pallet positions and warehouses</li> <li>• Truck routes</li> <li>• Stadiums and athletic facilities</li> </ul>
Guaranteed not to clog	
Use with Striping Machine or Striping Wand	
Meets USDA requirements for incidental food contact	


### COLORS (18 OZ.)

<b>1627838</b>	Blue	<b>1665838</b>	Red
<b>263446</b>	Dark Blue	<b>1677838</b>	Black
<b>1648838V</b>	Yellow	<b>1691838V</b>	White


### COMPANION PRODUCTS

<b>2395000</b>	Striping Machine	<b>2388000</b>	Striping Wand
----------------	------------------	----------------	---------------

### APPLICATION



### SUBSTRATES



AND MORE!



## MC1800 WATER-BASED PRECISION LINE® MARKING CHALK

Marking chalk for temporary markings that last up to 30 days.

Features	For Use On
Precision-line spray tip creates clean, easy-to-read markings	<ul style="list-style-type: none"> <li>• Utility</li> <li>• Construction and excavation</li> <li>• Surveying</li> <li>• Landscape and golf course markings</li> </ul>
Virtually no overspray	
Scuff-resistant in 10 minutes	
Convenient spray-through cap	
Locking tip does not pop off	
Can be easily removed with a wire brush and water or pressure washing	
Guaranteed not to clog	


### COLORS (17 OZ.)

<b>205236</b>	APWA Blue	<b>205233</b>	APWA Orange
<b>205238</b>	APWA Green	<b>205235</b>	APWA Red
<b>205234</b>	APWA Yellow	<b>205237</b>	APWA White


### COMPANION PRODUCTS

<b>268476</b>	Marking Wand	<b>210188</b>	Marking Pistol
---------------	--------------	---------------	----------------

### APPLICATION



### SUBSTRATES



AND MORE!



# Striping & Marking Paint



## AF1600 SYSTEM ATHLETIC FIELD INVERTED STRIPING PAINT

Water-based striping paint formula specially designed for use on athletic fields, playgrounds, golf courses and more.

Features	For Use On
Fast-drying formula creates bright, durable lines	<ul style="list-style-type: none"> <li>• Athletic fields</li> <li>• Playgrounds</li> <li>• Golf courses</li> </ul>
Will not harm grass	
Guaranteed not to clog	


### COLORS (17 OZ.)

<b>206045</b>	Yellow	<b>257406</b>	Fluorescent Orange
<b>206044</b>	Orange	<b>318192</b>	Scarlet Red
<b>206043</b>	White	<b>318193</b>	Royal Blue
<b>257403</b>	Fluorescent Green		


### COMPANION PRODUCTS

<b>206346</b>	Athletic Field Striping Machine
<b>2388000</b>	Striping Wand

### APPLICATION



### SUBSTRATES



AND MORE!



# Striping & Marking Paint

## COMPANION PRODUCTS



**STRIPING MACHINE**

**2395000**

### Features

- Create 2-4" straight lines quickly and easily
- Cover a larger area in a shorter time
- Convenient storage compartment holds 12 extra cans
- Sturdy steel construction
- Collapsible handle for easy storage



**ATHLETIC FIELD STRIPING MACHINE**

**206346**

### Features

- Create 3-6" straight lines quickly and easily
- Cover a larger area in a shorter time
- Convenient storage compartment holds 12 extra cans
- Sturdy steel construction
- Collapsible handle for easy storage
- Large diameter wheels to accommodate high grass conditions



**STRIPING WAND**

**2388000**

### Features

- Use for convenient touch-up of lines or stenciling
- Sturdy, lightweight construction



**MARKING WAND**

**268476**

### Features

- Easy, upright site marking
- Quick and convenient with no mess
- Comfortable grip
- Convenient flag holder
- Lightweight, yet durable construction
- Use with Rust-Oleum Inverted Marking Paint



**MARKING PISTOL**

**210188**

### Features

- Easy, accurate marking
- Light touch spray control
- Comfortable grip

# Striping & Marking Paint



## LIVESTOCK MARKING PAINT

Create ultra-crisp, long-lasting marks with Industrial Choice® Water-Based Inverted Livestock Marking Paint. This formula creates bright, easy-to-see, vivid markings in seven durable colors.

Features	For Use On
Safe to mark livestock without irritating the livestock's skin	• Livestock
High visibility colors ideal for tail marking (heat detection) and livestock identification applications	
Bright, robust markings even on wet surfaces	
Fade resistant with markings lasting up to 30 days	


### COLORS (17 OZ.)

<b>383005</b>	Fluorescent Red	<b>383019</b>	Fluorescent Blue
<b>383006</b>	Fluorescent Orange	<b>383020</b>	Fluorescent Yellow
<b>383007</b>	Fluorescent Green	<b>383021</b>	Fluorescent Purple
<b>383018</b>	Fluorescent Pink		

### COMPANION PRODUCTS

**210188** Marking Pistol

### APPLICATION



### SUBSTRATES



*\*Professional use. WARNING! Causes eye irritation. DO NOT SPRAY ON THE EYE OR MOUTH AREA OF ANIMALS OR HUMANS. NOT TO BE INGESTED. For further information refer to the manufacturer Safety Data Sheet.*





## RUST-OLEUM INDUSTRIAL COATINGS

Rust-Oleum industrial coatings are specifically designed to meet the diverse needs of industrial and commercial facilities. Our coatings are formulated to reduce prep time, application time and downtime while extending the service life of surfaces to which they are applied. We use only the highest quality pigments to ensure protection even in the harshest environments. Rust-Oleum backs up the High Performance product line with a Rust-Proof Guarantee\* so you can be confident that our products will provide a beautiful protective finish for years to come.



View all of our Professional Solutions products online

\*As our commitment to you, every product in the Rust-Oleum High Performance Coatings line offers a rust-proof guarantee ranging from 2 years all the way up to 10 years. On each product's web page, there's rust proof guarantee information with application details from surface prep to the finish coat to make sure you're getting the protection you need.



## INDUSTRIAL COATING CUSTOM COLORS

Rust-Oleum now tints custom colors for industrial maintenance coatings on demand to help keep your project timeline on schedule.

- Custom color ships next day
- No minimum or maximum order size
- Match any color (non-standard colors require a sample)

### Systems Available

- ROCAcrylic® Direct-to-Metal Acrylic Enamel 3800
- The MULE
- Beyond Acrylic Enamel
- S60 Epoxy Maintenance Coating
- MetalMax DTM Acrylic Enamel

### Match to Any Color

Contact your sales representative for additional information on color matching options.

## HOW TO ORDER CUSTOM WATER-BASED COLORS

Two pieces of information are required: The base and the color name & number

**Step 1: Identify the base to be used to achieve the desired color.**

**Step 2: Verify the description of the color that should be entered on the order.**

For clarifications about what base to use or the proper description to use on the order, please e-mail [tintcenter@rustoleum.com](mailto:tintcenter@rustoleum.com) or call 262-657-8529.

Orders may be placed with [orders@rustoleum.com](mailto:orders@rustoleum.com) as normal.

Note: Item numbers with a 'T' suffix indicate that the order is a custom tinted version of the corresponding base without the 'T'.

Note: Orders for custom colors must be separate from other items.

Please only include items with a 'T' suffix when ordering custom colors.

### EXAMPLES:

**Customer wants 2 gallons of Beyond Satin in RO Silver Gray**

Step 1: Verify base - 208040T

Step 2: Verify description - RO Silver Gray

**Customer wants 20 gallons of Federal Standard 27880 in S60 gloss**

Step 1: Verify base - 248273T

Step 2: Verify description - Fed STD 27880





## ROCPRIME® RUST INHIBITIVE UNIVERSAL ALKYD PRIMER

ROCPrime® Rust Inhibitive Universal Alkyd Primers are premium, lower VOC, designed for use in mild to moderate environments on interior and exterior metal, concrete, wood, drywall and other surfaces. These versatile primers not only offer excellent adhesion to various surfaces, but also provide superior stain blocking and hiding power as well. *Not for use on galvanized steel.*

Features	For Use On
Excellent adhesion to multiple surfaces	• Metal
Faster drying formula accepts recoating in as little as two hours	• Drywall
Suitable for interior and exterior use	• Wood
Stain blocking, high hiding formula for superior coverage	• Vinyl
Two-year rust proof guarantee*	

\*See Product's Web Page for Details


### COLORS (340 VOC GAL.)

<b>302140</b>	White	<b>330143</b>	Red
<b>302139</b>	White (5 gallon)	<b>330145</b>	Red (5 gallon)
<b>330142</b>	Gray		
<b>330144</b>	Gray (5 gallon)		


### COLORS (100 VOC GAL.)

<b>255610</b>	Red
<b>255617</b>	White

### APPLICATION



### SUBSTRATES



### COVERAGE

300-400 sq. ft./gal.

**VOC** <340g/L

**VOC** <100g/L






## ROCALKYD® DIRECT-TO-METAL ALKYD ENAMEL 7400/V7400/CV740

ROCALkyd® Direct-to-Metal Alkyd Enamel 7400/V7400/CV740 are Rust-Oleum's original rust preventive coatings for interior or exterior use. These products provide chemical and abrasion resistance for metal surfaces anywhere a smooth, hard, durable finish is desired, and corrosion protective performance is required. This product is available in three VOC categories, the 7400 is <450 VOC, the V7400 is <340 VOC and the CV740 is <100 VOC.


Features	For Use On
Easy to Apply, High Hide Formula	<ul style="list-style-type: none"> <li>• General plant maintenance</li> </ul>
Hard, Durable, Chemical and Abrasion Resistant	<ul style="list-style-type: none"> <li>• Machinery, equipment and structural steel</li> </ul>
Ultra-Smooth Finish That Resists Chipping, Fading and Weathering	<ul style="list-style-type: none"> <li>• Pipes, metal cabinets and lockers</li> <li>• Railings, trim, doors and gates</li> </ul>
Excellent Adhesion Over Minimally Prepared Surfaces	<ul style="list-style-type: none"> <li>• Vents and outdoor signage</li> <li>• Water towers, agriculture and drilling</li> </ul>
Two Year Rust-Proof Guarantee*	<ul style="list-style-type: none"> <li>• Coastal applications</li> </ul>

\*See Product's Web Page for Details

### APPLICATION



### SUBSTRATES



### COVERAGE – 7400

**230-390 sq. ft./gal.**

### COVERAGE – V7400

**230-530 sq. ft./gal.**

### COVERAGE – CV740

**230-530 sq. ft./gal.**

**VOC <450g/L**  
7400

**VOC <340g/L**  
V7400

**VOC <100g/L**  
CV740



## ROCALKYD® DIRECT-TO-METAL ALKYD ENAMEL 7400 READY MIX COLORS

### HIGH GLOSS COLORS (GAL.)

<b>634402</b> High Gloss Black	<b>2766402</b> High Gloss White
<b>634300</b> High Gloss Black (5 gallon)	<b>2766300</b> High Gloss White (5 gallon)

### GLOSS COLORS (GAL.)

<b>865402</b> Dunes Tan	<b>904402</b> Machine Tool Gray	<b>906402</b> Silver Gray
<b>977402</b> Chestnut Brown	<b>975402</b> Navy Gray	
<b>1282402</b> Forest Green	<b>975300</b> Navy Gray (5 gallon)	

### SEMI-GLOSS COLORS (GAL.)

**7290402** White

### FLAT COLORS (GAL.)

<b>412402</b> Flat Black	<b>2764402</b> Flat White
--------------------------	---------------------------

### SAFETY COLORS (HIGH GLOSS) (GAL.)

<b>925402</b> Safety Blue	<b>956402</b> Safety Orange	<b>944300</b> Safety Yellow (5 gallon)
<b>925300</b> Safety Blue (5 gallon)	<b>964402</b> Safety Red	
<b>933402</b> Safety Green	<b>944402</b> Safety Yellow	

## ROCALKYD® DIRECT-TO-METAL ALKYD ENAMEL V7400 READY MIX COLORS AND TINT BASES

### HIGH GLOSS COLORS (GAL.)

<b>245403</b>	Black	<b>245405</b>	Black (5 gallon)	<b>245406</b>	White	<b>245407</b>	White (5 gallon)
---------------	-------	---------------	------------------	---------------	-------	---------------	------------------

### GLOSS COLORS (GAL.)

<b>245308</b>	Almond	<b>245388</b>	Forest Green	<b>245443</b>	Navy Gray	<b>245381</b>	Clear (Clear-Sele®)
<b>245309</b>	Aluminum *<500 g/L	<b>245500</b>	Old Caterpillar Yellow	<b>245444</b>	Navy Gray (5 gallon)		
<b>245382</b>	Dunes Tan	<b>245489</b>	New Caterpillar Yellow	<b>245484</b>	Silver Gray		
<b>245380</b>	Chestnut Brown	<b>245409</b>	Machine Tool Gray	<b>245485</b>	Silver Gray (5 gallon)		

### SEMI-GLOSS COLORS (GAL.)

<b>245483</b>	White	<b>323807</b>	Black
---------------	-------	---------------	-------

### FLAT COLORS (GAL.)

<b>245387</b>	Flat Black	<b>245533</b>	Flat White
---------------	------------	---------------	------------

### SAFETY COLORS (GLOSS) (GAL.)

<b>245474</b>	Safety Blue	<b>245476</b>	Safety Green	<b>245478</b>	Safety Red	<b>245480</b>	Safety Yellow (5 gallon)
<b>245475</b>	Safety Blue (5 gallon)	<b>245477</b>	Safety Orange	<b>245479</b>	Safety Yellow		

### TINT BASES (GLOSS) (GAL.)

<b>245515</b>	Gloss Red	<b>245517</b>	Gloss Masstone	<b>245518</b>	Gloss Deep	<b>245519</b>	Gloss Light
<b>245516</b>	Gloss Yellow	<b>245530</b>	Gloss Masstone (5 gallon)	<b>245531</b>	Gloss Deep (5 gallon)	<b>245532</b>	Gloss Light (5 gallon)

### TINT BASES (SEMI-GLOSS) (GAL.)

<b>323815</b>	Semi-Gloss Masstone	<b>323809</b>	Semi-Gloss Deep	<b>323813</b>	Semi-Gloss Light
---------------	---------------------	---------------	-----------------	---------------	------------------

### TINT BASES (SATIN) (GAL.)

<b>323816</b>	Satin Masstone
<b>323810</b>	Satin Deep
<b>323814</b>	Satin Light

## ROCALKYD® DIRECT-TO-METAL ALKYD ENAMEL CV740 READY MIX COLORS

### GLOSS COLORS (GAL.)

<b>255611</b>	Black	<b>255615</b>	Safety Red	<b>255619</b>	Pastel Tint Base
<b>261957</b>	Dunes Tan	<b>255616</b>	Safety Yellow	<b>261961</b>	Deep Tint Base
<b>255613</b>	Navy Gray	<b>261956</b>	Silver Gray	<b>255618</b>	Masstone Tint Base
<b>261959</b>	Safety Blue	<b>255614</b>	White		

### SATIN COLORS (GAL.)

<b>282733</b>	Pastel Tint Base	<b>282736</b>	Masstone Base
<b>282734</b>	Deep Tint Base		

### FLAT COLORS (GAL.)

<b>255609</b>	Flat Black
---------------	------------




## ROCPRIME® 769 DAMP PROOF ALKYD PRIMER

Rust-Oleum's flagship rust-preventive primer, designed to bond tightly to rusted metal and provide excellent rust and corrosion protection. Suitable for both indoor and outdoor use, this modified alkyd primer requires minimal surface preparation and ensures a strong surface for topcoats to adhere to.

Features	For Use On
Provides Excellent Rust and Corrosion Protection	<ul style="list-style-type: none"> <li>Interior and exterior commercial metal applications</li> <li>Metal trim, doors and structural steel</li> <li>Handrails, fixtures and fire escapes</li> <li>Vents, fences and hydrants</li> <li>Cabinets and channels</li> </ul>
Creates a flat, red, paintable surface	
Ideally to be top coated with Rust-Oleum ROAlkyd® products	
Can be applied as low as 32°F	
Two-Year Rust Proof Guarantee*	

\*See Product's Web Page for Details

### APPLICATION



### SUBSTRATES



### COVERAGE

305-615 sq. ft./gal.



COMPLIANT NATIONWIDE



### COLORS (GAL.)

769402 Flat Red






## ROCALKYD® HIGH HEAT COATING

ROCALKYD® High Heat Coatings offer three levels of heat protection and will withstand continuous exposure to the temperatures in their posted range. General Purpose is designed for surfaces exposed to temperatures up to 400°F. Heavy Duty is designed for surfaces exposed to temperatures up to 800°F. High-Performance offers the highest level of heat protection for surfaces exposed to temperatures up to 1200°F. These products are self-priming can be applied directly to metal and prepared previously coated surfaces.


Features	For Use On
Withstands Temperatures up to 400°F, 800°F and 1200°F	<ul style="list-style-type: none"> <li>High heat coatings: pipes, kilns, furnances, boilers, incinerators, smoke stacks and more</li> </ul>
Self-Priming, Direct-to-Metal Application	
Available in Flat Black or Aluminum Finishes	
VOC Compliant Nationwide	
Two-Year Rust-Proof Guarantee*	

\*See Product's Web Page for Details

### APPLICATION



### SUBSTRATES



VOC <420g/L

COMPLIANT NATIONWIDE



### COLORS (GAL.)

#### General Purpose (500°F)

**286501** Aluminum  
**286503** Black

#### Heavy Duty (800°F)

**286507** Aluminum  
**286509** Black

#### High Performance (1200°F)

**286510** Aluminum  
**286512** Black





## UNIVERSAL ACRYLIC PRIMER


A water-based primer that is great for any surface.

Features	For Use On
Designed for interior and exterior applications	<ul style="list-style-type: none"> <li>• Equipment</li> <li>• Structural steel and pipes</li> <li>• Metal cabinets and lockers</li> <li>• Railings, trim and doors</li> <li>• Gates &amp; vents</li> </ul>
Great hide and adhesion	
Stain blocker	
Rust-inhibitive	
MPI #107 & #134 certified	


### COLORS (GAL.)

<b>278808</b>	White	<b>292606</b>	Gray
<b>278807</b>	White (5 gallon)	<b>292603</b>	Gray (5 gallon)

### APPLICATION



### SUBSTRATES



### COVERAGE

350-450 sq. ft./gal.



# Coatings | MODIFIED URETHANE LATEX EPOXY




## THE MULE: MODIFIED URETHANE LATEX EPOXY


The MULE is an easy to use, versatile, abrasion resistant coating designed for high traffic areas that are subject to routine cleaning and disinfecting. This Modified Urethane Latex Epoxy (The MULE) can be applied inside or outside on walls, doors, trim, railings and even floors\*.

Features	For Use On
Versatile, abrasion resistant coating for walls, doors, trim and floors*	<ul style="list-style-type: none"> <li>Interior and exterior walls</li> <li>Doors and door frames</li> </ul>
Highly washable, ultra smooth finish	<ul style="list-style-type: none"> <li>Railings</li> </ul>
Great adhesion on multiple surfaces	<ul style="list-style-type: none"> <li>Storage racks</li> </ul>
Low odor, water-based formula	<ul style="list-style-type: none"> <li>Parking lot striping and line striping</li> </ul>
Interior or exterior use	<ul style="list-style-type: none"> <li>Cabinets</li> </ul>
VOC compliant nationwide	<ul style="list-style-type: none"> <li>Stairs and floors*</li> </ul>

### APPLICATION



### SUBSTRATES



### COVERAGE

155-330 sq. ft./gal.

**VOC** <50g/L

\*Floor Use: Recommended for pedestrian walkways and line striping exposed to heavy foot traffic and carts, showrooms, storage areas and light traffic garages. Not recommended for heavy vehicle or constant forklift traffic areas or any areas exposed to frequent moderate or harsh chemicals. Refer to the Technical Data Sheet for additional information.

### GLOSS COLORS (GAL.)


<b>375645</b>	Black	<b>393445</b>	Safety Red	<b>393447</b>	Navy Gray
<b>381208</b>	Dunes Tan	<b>393446</b>	Safety Blue	<b>375658</b>	White
<b>375661</b>	Safety Yellow	<b>375642</b>	Silver Gray	<b>393941</b>	White (5 gallon)

### SEMI-GLOSS COLORS (GAL.)

<b>374340</b>	Light Tint Base	<b>374346</b>	Light Tint Base (5 gallon)	<b>393450</b>	White
<b>382498</b>	Deep Tint Base	<b>382555</b>	Deep Tint Base (5 gallon)	<b>393942</b>	White (5 gallon)
<b>374342</b>	Masstone Tint Base	<b>374348</b>	Masstone Tint Base (5 gallon)	<b>393451</b>	Black

### SATIN/EGGSHELL COLORS (GAL.)

<b>374341</b>	Light Tint Base	<b>374347</b>	Light Tint Base (5 gallon)	<b>393448</b>	White
<b>382500</b>	Deep Tint Base	<b>382557</b>	Deep Tint Base (5 gallon)	<b>393943</b>	White (5 gallon)
<b>374343</b>	Masstone Tint Base	<b>374349</b>	Masstone Tint Base (5 gallon)	<b>393449</b>	Black

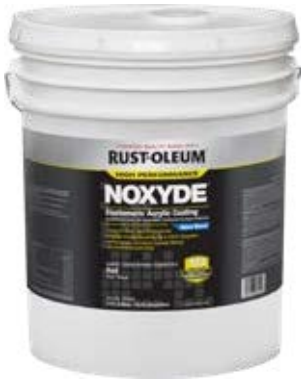

## NOXYDE® ELASTOMERIC ACRYLIC COATING

Noxyde Elastomeric Acrylic Coating is a high-performance, high-build, rust-preventative water-based coating. Noxyde is self-priming and designed for marginally prepared, sound-rusted, or clean steel in mild to severe industrial environments. It can also be used on concrete and has excellent elongation properties of 200% making it suitable for bridging small cracks. This single component coating resists corrosion, rust, and water even in severe marine environments. Can be top coated with multiple Rust-Oleum High Performance products for an extended service life for your assets.

Features	For Use On
Direct-to-Metal, Self-Priming, High-Build Water-Based Formula	<ul style="list-style-type: none"> <li>Structural steel &amp; bridges</li> <li>Machinery &amp; equipment</li> </ul>
Performs Like Zinc/Epoxy Coatings Without the need to Abrasive Blast	<ul style="list-style-type: none"> <li>Areas with heavy corrosion</li> </ul>
Provides Flexible Durability - Up to 200% Elongation	<ul style="list-style-type: none"> <li>Tank exteriors, metal roofs &amp; cladding</li> </ul>
Excellent Adhesion and Performance over Minimal Surface Prep	<ul style="list-style-type: none"> <li>Ideal for anywhere that edge coverage is essential and high protection, adhesion or elasticity is needed</li> </ul>
Ten-Year Rust-Proof Guarantee*	

\*See TDS for application guidance on these substrates.


### COLORS (5 GAL.)

<b>283092</b>	Red	<b>283088</b>	Beige Gray	<b>283085</b>	Off White
<b>283089</b>	Reseda Green	<b>283094</b>	Gray Green	<b>283091</b>	Black
<b>283093</b>	Blue	<b>283086</b>	Blue Gray	<b>283090</b>	White
<b>283097</b>	Brown	<b>283095</b>	Gravel Gray	<b>329514</b>	Silver Gray

### APPLICATION



### SUBSTRATES



\*Must be primed

### COVERAGE

110 sq. ft./gal.






## BEYOND™ ACRYLIC ENAMEL


A water-based, urethane modified acrylic provides excellent color retention and durability.

Features	For Use On
Low VOCs, low HAPs and no solvent odor	<ul style="list-style-type: none"> <li>Anywhere paint odors or VOC are a concern</li> </ul>
Dries fast — 30 minutes to touch and tack free	<ul style="list-style-type: none"> <li>Food and beverage plants</li> </ul>
Multiple coats can be applied in one day	<ul style="list-style-type: none"> <li>Schools, healthcare and warehouses</li> </ul>
Superior resistance to chipping, cracking and peeling	<ul style="list-style-type: none"> <li>Food service, office buildings and hotels</li> </ul>
Non-blocking and mar resistant	<ul style="list-style-type: none"> <li>Walls, doors and cabinets</li> </ul>
Results in a smooth, washable, professional finish	<ul style="list-style-type: none"> <li>Trim, furniture, equipment and tanks</li> </ul>
Meets USDA requirements for incidental food contact	
MPI #118 certified	

### APPLICATION



### SUBSTRATES



### COVERAGE

165-520 sq. ft./gal.

**VOC** <50g/L

COMPLIANT NATIONWIDE

### COLORS (SATIN) (GAL.)

<b>208040</b>	White Pastel Base	<b>208043</b>	Tint Base (5 gallon)	<b>208046</b>	Accent Base
<b>208041</b>	White Pastel Base (5 gallon)	<b>208044</b>	Deep Base	<b>365011</b>	Accent Base (5 gallon)
<b>208042</b>	Tint Base	<b>365010</b>	Deep Base (5 gallon)	<b>210479</b>	Clear

### COLORS (GLOSS) (GAL.)

<b>208050</b>	White Pastel Base	<b>208055</b>	Deep Base (5 gallon)	<b>210491</b>	Clear
<b>208051</b>	White Pastel Base (5 gallon)	<b>208056</b>	Accent Base	<b>238748</b>	White
<b>208052</b>	Tint Base	<b>208057</b>	Accent Base (5 gallon)	<b>238750</b>	Navy Gray
<b>208054</b>	Deep Base	<b>208058</b>	Black		

### SAFETY COLORS (GLOSS) (GAL.)

<b>238751</b>	Safety Blue
<b>210493</b>	Safety Red
<b>210495</b>	Safety Yellow




## METALMAX® HIGH GLOSS DTM ACRYLIC ENAMEL


Direct-to-metal (DTM), water-based, urethane modified acrylic provides excellent corrosion and humidity resistance.

Features	For Use On
Low VOCs, low HAPs and no solvent odor	<ul style="list-style-type: none"> <li>• Anywhere paint odors or VOC is a concern</li> <li>• Food &amp; beverage plants</li> <li>• Schools, healthcare &amp; warehouses</li> <li>• Food service, office buildings &amp; hotels</li> <li>• Metal structures, handrails &amp; fencing</li> <li>• Line equipment &amp; machinery</li> </ul>
Dries fast — 30 minutes to touch and tack free	
Excellent color retention	
Protects new and previously painted metal	
Can be used as a primer under Beyond™ finishes	
Results in a smooth, washable, professional finish	
Meets USDA requirements for incidental food contact	

### APPLICATION



### SUBSTRATES



### COVERAGE

180-545 sq. ft./gal.



### COLORS (GLOSS) (GAL.)

<b>264176</b>	Tint Base	<b>264173</b>	Accent Base	<b>264179</b>	White
<b>264170</b>	Deep Base	<b>264186</b>	Black		

### COLORS (SEMI-GLOSS) (GAL.)

<b>208031</b>	White Pastel Base	<b>208037</b>	Accent Base	<b>238754</b>	Navy Gray
<b>208033</b>	Tint Base	<b>208039</b>	Black		
<b>208035</b>	Deep Base	<b>238752</b>	White		

### COLORS (SATIN) (GAL.)

<b>282538</b>	Pastel Base	<b>282536</b>	Accent Base	<b>282539</b>	White
<b>282537</b>	Deep Base	<b>282540</b>	Black		

### SAFETY COLORS (GLOSS) (GAL.)

<b>264183</b>	Safety Yellow	<b>264182</b>	Safety Red	<b>264184</b>	Safety Blue
---------------	---------------	---------------	------------	---------------	-------------

### SAFETY COLORS (SEMI-GLOSS) (GAL.)

<b>210477</b>	Safety Yellow	<b>210475</b>	Safety Red	<b>238753</b>	Safety Blue
---------------	---------------	---------------	------------	---------------	-------------



## ROCALKYD® COLD GALVANIZING COMPOUND 7000

ROCALKYD® Cold Galvanizing Compound 7000 is a high-performance, self-priming coating that instantly repairs worn or damaged galvanized steel or metal surfaces. This coating contains 95% pure zinc in the dry film. Cold Galvanizing Compound is perfect when maximum corrosion protection is required or to protect and repair bare sheet metal, galvanized ducts, storage tanks, fences, gutters, trucks, trailers and more.

Features	For Use On
95% Pure Zinc in Dry Film for Cathodic Corrosion Protection	<ul style="list-style-type: none"> <li>Bare sheet metal and production welds</li> </ul>
Self-Priming and Excellent Adhesion to Galvanized Metal	<ul style="list-style-type: none"> <li>Galvanized ducts and storage tanks</li> </ul>
Apply by Spray for a Smooth, Gray Finish	<ul style="list-style-type: none"> <li>Fences, gutters, trucks and trailers</li> </ul>
Meets Requirements for ASTM A-780-01, SSPC Paint 20, MIL-P-21035B	<ul style="list-style-type: none"> <li>Offshore drilling rigs and utility towers</li> </ul>
Two-Year Rust-Proof Guarantee*	

\*See Product's Web Page for Details

### COLORS (GAL.)

- 206193** Cold Galvanizing Compound  
**206194T** Cold Galvanizing Compound (quart)

### APPLICATION



### SUBSTRATES



### COVERAGE

310-440 sq. ft./gal.

**VOC** <340g/L

METALLIC  
COMPLIANT NATIONWIDE






## ROCACRYLIC® DIRECT-TO-METAL ACRYLIC ENAMEL 3800

Acrylic Direct-to-Metal Acrylic Enamel 3800 is a high-performance, fast drying, water-based coating for interior or exterior use. This product provides excellent corrosion and adhesion, UV and impact resistance suitable for painting multiple surfaces anywhere an ultra-smooth, durable finish is desired, and corrosion protection is required.


Features	For Use On
Fast Drying, Water-Based Formula	<ul style="list-style-type: none"> <li>• Doors, frames and window trim</li> <li>• Machinery and equipment</li> <li>• Railings, pipes and bollards</li> <li>• Metal cabinets and lockers</li> </ul>
Excellent Corrosion Protection	
Ultra-Smooth Finished Appearance	
UV Resistant for Color and Gloss Retention	
Two Year Rust-Proof Guarantee*	

\*See Product's Web Page for Details

### APPLICATION



### SUBSTRATES



### COVERAGE

150-275 sq. ft./gal.

VOC <250g/L



### COLORS (GLOSS) (GAL.)

<b>314389</b> White	<b>316534</b> Black (5 gallon)	<b>315508</b> Dunes Tan
<b>316531</b> White (5 gallon)	<b>315506</b> Silver Gray	<b>316542</b> Dunes Tan (5 gallon)
<b>314388</b> Navy Gray	<b>316540</b> Silver Gray (5 gallon)	
<b>316533</b> Navy Gray (5 gallon)	<b>315509</b> Forest Green	
<b>314387</b> Black	<b>316543</b> Forest Green (5 gallon)	

### SAFETY COLORS (GLOSS) (GAL.)

<b>314209</b> Safety Blue	<b>314410</b> Safety Red	<b>314407</b> Safety Green
<b>316538</b> Safety Blue (5 gallon)	<b>316535</b> Safety Red (5 gallon)	<b>316537</b> Safety Green (5 gallon)
<b>315510</b> Safety Orange	<b>314409</b> Safety Yellow	
<b>316544</b> Safety Orange (5 gallon)	<b>316536</b> Safety Yellow (5 gallon)	

### COLORS (SATIN) (GAL.)

**350412** Black

### COLORS (FLAT) (GAL.)

<b>340657</b> White	<b>340656</b> Black
<b>340665</b> White (5 gallon)	<b>340664</b> Black (5 gallon)

### TINT BASES (GLOSS) (GAL.)

<b>314592</b> Masstone Tint Base	<b>314593</b> Deep Tint Base	<b>314594</b> Light Tint Base
<b>316520</b> Masstone Tint Base (5 gallon)	<b>316519</b> Deep Tint Base (5 gallon)	<b>316518</b> Light Tint Base (5 gallon)

### TINT BASES (SEMI-GLOSS) (GAL.)

<b>324167</b> Light Tint Base	<b>324171</b> Deep Tint Base (5 gallon)
<b>324170</b> Light Tint Base (5 gallon)	<b>324169</b> Masstone Tint Base
<b>324168</b> Deep Tint Base	<b>324172</b> Masstone Tint Base (5 gallon)

### TINT BASES (SATIN) (GAL.)

<b>340651</b> Masstone Tint Base	<b>340649</b> Deep Tint Base	<b>340652</b> Light Tint Base
<b>340659</b> Masstone Tint Base (5 gallon)	<b>340658</b> Deep Tint Base (5 gallon)	<b>340660</b> Light Tint Base (5 gallon)



## ROCEPOXY® HIGH SOLIDS EPOXY PRIMER HS9300

ROCEpoxy® High Solids Epoxy Primer HS9300 is a fast drying, two-component product designed to be part of a coating system for superior corrosion protection. This high solids, rust-inhibitive primer can be applied to clean, abrasive blasted steel or slightly rusted steel, masonry or concrete. It can be top-coated with several Rust-Oleum Industrial products including ROCEpoxy® Direct-to-Metal Epoxy Mastic 9100, ROCThane® Fine Finish Urethane 9400 and ROCThane® Direct-To-Metal Urethane Mastic 9800.

Features	For Use On
High Solids, Fast Drying Epoxy Primer for Long Term Surface Protection	<ul style="list-style-type: none"> <li>• Steel beams and structural steel</li> </ul>
Excellent Adhesion on Multiple Substrates	<ul style="list-style-type: none"> <li>• Towers and conveyors</li> </ul>
Smooth Finish Compatible with Several Rust-Oleum Topcoats	<ul style="list-style-type: none"> <li>• Industrial equipment and storage tanks</li> </ul>
Fast Drying and Can be Top-Coated in 1 Hour	<ul style="list-style-type: none"> <li>• Sewage treatment basins</li> </ul>
Five Year Rust-Proof Guarantee*	<ul style="list-style-type: none"> <li>• Non-potable water storage facilities</li> <li>• Steel handrails and floors</li> </ul>


\*See Product's Web Page for Details

This is a two-component system. Order base and activator separately.


STANDARD PRIMERS (GAL.)  
For recoat times less than 16 hours

<b>HS9369407</b>	Red Primer	<b>HS9303604</b>	Primer Activator
<b>HS9381407</b>	Gray Primer		

### APPLICATION



### SUBSTRATES



### COVERAGE

275-475 sq. ft./gal.

**VOC <420g/L**  
Standard Primer





## ROCPRIME WATER-BASED HYBRID 1K EPOXY PRIMER

ROCPrime® Water-Based Hybrid 1K Epoxy Primer is a high-performance, universal primer for interior or exterior applications in mild to moderate environments. ROCPrime® accepts all topcoats and is designed to deliver two-component performance in a single component. This product provides excellent adhesion to almost any substrate including steel, stainless steel, galvanized steel, aluminum, concrete, wood, glass, previously coated, and more.


Features	For Use On
Single Component, Water-Based Formula	<ul style="list-style-type: none"> <li>• Food and beverage plants</li> <li>• Schools, healthcare and warehouses</li> <li>• Food service, office buildings and hotels</li> <li>• Equipment, machinery and steel surfaces</li> <li>• General maintenance</li> </ul>
Universal Primer for All Rust-Oleum High Performance Topcoats	
Excellent Adhesion on Multiple Substrates	
Low Odor and Low VOC	
Two-Year Rust-Proof Guarantee*	

\*See Product's Web Page for Details


### PRIMERS

<b>358063</b>	Gray (1 gallon)
<b>358062</b>	Gray (5 gallon)

### APPLICATION



### SUBSTRATES



### COVERAGE

200-300 sq. ft./gal.



## S70 SYSTEM WATER-BASED EPOXY PRIMER

Water-based, epoxy primer with outstanding chemical and corrosion resistance.

Features	For Use On
Low VOCs, low HAPs and no solvent odor	<ul style="list-style-type: none"> <li>• Food and beverage plants</li> <li>• Schools, healthcare and warehouses</li> <li>• Food service, office buildings and hotels</li> <li>• Equipment, machinery and steel surfaces</li> <li>• General maintenance</li> </ul>
Superior adhesion	
Dries fast — 30 minutes to touch and tack free	
Meets USDA requirements for incidental food contact	

*This is a two-component system. Order base and activator separately.*

### PRIMERS (BRUSH) (GAL.)

<b>208110</b>	White
---------------	-------


### PRIMERS (SPRAY)

<b>208113</b>	Gray
---------------	------


### ACTIVATOR

<b>208112</b>	S70 Activator
---------------	---------------

### APPLICATION



### SUBSTRATES



### COVERAGE

200-300 sq. ft./gal.





## ROCEPOXY® DIRECT-TO-METAL EPOXY MASTIC 9100

ROCEpoxy® Direct-To-Metal Epoxy Mastic 9100 is a two-component, high solids epoxy coating that provides a durable, abrasion and chemical resistant protective surface suitable for most all industrial environments. As Rust-Oleum's most versatile industrial product, it can be applied directly to sound rusted steel, galvanized metal, clean steel, concrete, and even slightly damp surfaces. This product was developed with the end user in mind. It has a convenient 1:1 mix ratio, a pot life of a minimum of two hours, and has multiple activator options, including: Fast Cure, Low Temp, Immersion, Satin Finish as well as the Standard activator. Can also be used as a primer under Rust-Oleum ROCThane® high performance topcoats. ROCEpoxy® Direct-To-Metal Epoxy Mastic 9100 is available in two VOC levels, 340 VOC and 250 VOC, depending on the activator you choose.

Features	For Use On
Extremely Versatile, Easy to Use, Durable, Solvent-Based Epoxy	<ul style="list-style-type: none"> <li>Steel beams, structural steel and towers</li> </ul>
Direct-To-Metal and Self-Priming on a Variety of Substrates	<ul style="list-style-type: none"> <li>Concrete floors and conveyors</li> </ul>
Ultra-Smooth Finish with High Build Capability on Edges and Welds	<ul style="list-style-type: none"> <li>Industrial equipment and storage tanks</li> </ul>
Superior Resistance to Solvents, Chemical, Abrasion and Impact	<ul style="list-style-type: none"> <li>Sewage treatment basins</li> <li>Non-potable water storage facilities</li> </ul>
Five Year Rust-Proof Guarantee*	<ul style="list-style-type: none"> <li>Steel handrails</li> </ul>

\*See Product's Web Page for Details

### STANDARD ACTIVATOR

- For air and surface temperatures of 50-100°F (10-38°C)

### IMMERSION ACTIVATOR

- For fresh or salt water immersion of steel or concrete where water temperatures do not exceed 125°F (52°C)
- Great for use in floor coating applications
- Produces slightly lower gloss than standard activator
- Not for use in potable water tanks

This is a two-component system. Order base and activator separately.

### COLORS (GAL.)

<b>9171402</b> Dunes Tan	<b>9186300</b> Navy Gray (5 gallon)	<b>9179402</b> Black
<b>9171300</b> Dunes Tan (5 gallon)	<b>9182402</b> Silver Gray	<b>9192402</b> White
<b>9122402</b> Marlin Blue	<b>9182300</b> Silver Gray (5 gallon)	<b>9192300</b> White (5 gallon)
<b>9186402</b> Navy Gray	<b>9115402</b> Aluminum	

### SAFETY COLORS (GAL.)

<b>9125402</b> Safety Blue	<b>9144402</b> Safety Yellow	<b>204005</b> Safety Orange
<b>9133402</b> Safety Green	<b>204006</b> Safety Red	<b>297081</b> Safety Orange (5 gallon)


### TINT BASES (GAL.)

<b>9105405</b> Red	<b>9108421</b> Deep	<b>9109388</b> Light (5 gallon)
<b>9106405</b> Yellow	<b>9108381</b> Deep (5 gallon)	
<b>9107405</b> Masstone	<b>9109408</b> Light	


### ACTIVATORS

<b>205015</b> Standard (<250 g/L)	<b>9102402†</b> Immersion (<340 g/L)	<b>9101402</b> Standard (<340 g/L)
<b>214430†</b> Immersion (<250 g/L)	<b>9102300†</b> Immersion (<340 g/L) (5 Gal.)	<b>9101300</b> Standard (<340 g/L) (5 Gal.)
<b>9103402</b> Low Temp. (<340 g/L)	<b>9104402†</b> Fast Dry (<340 g/L)	
<b>214432</b> Fast Dry (<250 g/L)	<b>A910008300†</b> Fast Dry (<340 g/L) (5 Gal.)	
<b>331254</b> Satin Activator (<250 g/L)	<b>206232</b> Low VOC Standard (<250 g/L)	

### APPLICATION



### SUBSTRATES



### COVERAGE

125-225 sq. ft./gal.

VOC <340g/L

VOC <250g/L



### LOW TEMPERATURE ACTIVATOR

- For air and surface temperatures of 40-60°F (5-15°C)

### FAST-CURE ACTIVATOR

- Faster cure to minimize downtime
- Recoat in 4 hours at 70°F (21°C) and 50% RH
- For air and surface temperature of 50-100°F (10-38°C)
- Produces slightly lower gloss than standard activator

† Not for use with Tint Bases



## ROCEPOXY® DIRECT-TO-METAL LOW TEMPERATURE CURE EPOXY 9200

ROCEPOXY® Direct-To-Metal Low Temperature Cure Epoxy 9200 is a specially designed two-component product that can be applied in temperatures as low as 20° F, is immersion grade and is certified for use in potable water storage tanks of 4000-gallon capacity or larger (in some colors). In order to meet the UL Certification drinking water criteria of NSF/ANSI/CAN 600, the coating must cure for 7 days at a minimum of 75°F.

Features	For Use On
High Solids, Self-Priming, Direct-To-Metal Application	<ul style="list-style-type: none"> <li>Offshore rigs</li> <li>Potable water tanks</li> <li>Dams</li> <li>Boats</li> </ul>
Low Temperature Cure as Low as 20°F	
Ultra-Smooth, Gloss Finish	
Excellent Surface Wetting and Good Early Moisture Resistance	
Five Year Rust-Proof Guarantee*	

\*See Product's Web Page for Details

### COLORS (5 GAL.)

<b>316834</b>	Gray	<b>318207</b>	Blue
<b>316835</b>	White	<b>320261</b>	Safety Yellow*

### ACTIVATOR

<b>316836</b>	Activator
---------------	-----------

\*Note: Safety Yellow is not approved for potable water use

### APPLICATION



Brush



Roller




Spray Gun

### SUBSTRATES



Steel



Concrete

### COVERAGE

140-225 sq. ft./gal.

**VOC** <250g/L





## ROCEPOXY® COAL TAR EPOXY C9578

ROCEPOXY® Coal Tar Epoxy C9578 is a high-solids, two-component, polyamide-converted epoxy that includes refined coal tar pitch which forms an extremely durable coating. The self-priming, high-build formula protects against severe abrasion, strong chemicals, and water immersion in severe industrial and marine environments. Coal Tar Epoxy is ideal for use on steel, concrete, and other surfaces exposed to extremely corrosive environments.

Features	For Use On
Self-Priming, Direct-to-Metal application	<ul style="list-style-type: none"> <li>• Heavy-duty tanks</li> <li>• Barges, sump and pipelines</li> </ul>
Excellent Chemical and Abrasion Resistance	
High-Solids, High-Build Formula	
Meets COE C-200/C-200A and AWWA C-210 Specifications	
Five-Year Rust-Proof Guarantee*	


\*See Product's Web Page for Details

*This is a two-component system. Order base and activator separately.*


### PRODUCT (GAL.)

- C9578402** Coal Tar Epoxy
- C9502504** Coal Tar Epoxy Activator
- C9578380** Coal Tar Epoxy Base (4 gallon)
- C9502402** Coal Tar Epoxy Activator (1 gallon)

### APPLICATION



### SUBSTRATES



### COVERAGE

100-130 sq. ft./gal.

**VOC** <250g/L





## S60 SYSTEM WATER-BASED EPOXY MAINTENANCE COATING

Versatile, high performance water-based epoxy maintenance coating kit.

Features	For Use On
Low VOCs, low HAPS and low solvent odor	<ul style="list-style-type: none"> <li>• Food and beverage plants</li> </ul>
Convenient, ready-to-mix industrial maintenance coating kit formulated to stand up to frequent washdowns and cleaning	<ul style="list-style-type: none"> <li>• Schools, healthcare and warehouses</li> </ul>
Fast return to service (30 minutes dry to the touch, return to service in 24 hours)	<ul style="list-style-type: none"> <li>• Food service, office buildings and hotels</li> </ul>
Excellent application on floors and vertical surfaces	<ul style="list-style-type: none"> <li>• Equipment, machinery and steel surfaces</li> </ul>
Meets USDA requirements for incidental food contact	<ul style="list-style-type: none"> <li>• General maintenance</li> <li>• Areas subject to frequent washdowns</li> </ul>

*This is a two-component system. Kits contain base and activator. Tint base and activator sold separately.*

### KITS

<b>248285</b> Stone Gray	<b>248291</b> OSHA Safety Blue	<b>251212</b> Classic Gray
<b>248287</b> OSHA Safety Red	<b>248289</b> Oyster White	
<b>248288</b> OSHA Safety Yellow	<b>248290</b> Black	

### GLOSS FINISHES (GAL.)

<b>248273</b> White Pastel Base	<b>208066</b> Clear	<b>248283</b> OSHA Safety Blue
<b>248274</b> Tint Base	<b>208072</b> Classic Gray	<b>248282</b> Black
<b>248275</b> Deep Base	<b>248299</b> OSHA Safety Red	<b>248281</b> Oyster White
<b>248276</b> Accent Base	<b>248280</b> OSHA Safety Yellow	


### SATIN FINISHES (GAL.)

<b>282601</b> Deep Base	<b>282600</b> Accent Base	<b>208084</b> Clear
<b>282602</b> Pastel Base	<b>208090</b> Classic Gray	


### ACTIVATORS

<b>248284</b> Gloss Activator	<b>283742</b> Satin Activator
-------------------------------	-------------------------------

### APPLICATION



### SUBSTRATES



### COVERAGE

230-340 sq. ft./gal.






## ROCTHANE® FINE FINISH URETHANE 9400

ROCThane® Fine Finish Urethane 9400 is a two-component, polyester urethane with an ultra-high gloss finish designed for vehicle refinishing, industrial maintenance, tanks and structural steel exposed to severe coastal, offshore or other aggressive environments. This product offers two activators, a standard activator that is vehicle refinishing grade and its lower VOC counterpart high solids activator for industrial maintenance use. Use as a topcoat over ROCEpoxy® High Solids Epoxy Primer for maximum corrosion protection.


Features	For Use On
Excellent Corrosion Protection in Aggressive Environments	<ul style="list-style-type: none"> <li>• Vehicle refinishing</li> <li>• Structural steel, conveyors and tanks</li> <li>• Aggressive maintenance applications</li> </ul>
Extremely Durable, Chemical and Abrasion Resistance	
Ultra-High Gloss, Vehicle Grade Fine Finish	
Outstanding Color and Gloss Retention	
Five Year Rust-Proof Guarantee*	

\*See Product's Web Page for Details

### APPLICATION



### SUBSTRATES



† Touch-ups only

### COVERAGE

260-560 sq. ft./gal.



*This is a two-component system. Order base and activator separately.*

### COLORS (GAL.)

<b>9465402</b> Red	<b>9479402</b> Black	<b>9410402</b> Clear
<b>9483402</b> Gray	<b>9492402</b> White	

### TINT BASES (GAL.)

<b>9405405</b> Red	<b>9407405</b> Masstone	<b>9409408</b> Light
<b>9406405</b> Yellow	<b>9408421</b> Deep	

### ACTIVATORS

<b>9401402</b> Standard Activator VOC <600 g/L	<b>HS9401402</b> High Solids Activator VOC <420 g/L
---	--

### COMPANION PRODUCTS

<b>202548</b> Urethane Accelerator
<b>9404730</b> Leveling Additive




## ROCThane® DIRECT-TO-METAL URETHANE MASTIC 9800

ROCThane® Direct-To-Metal Urethane Mastic 9800 is an aliphatic acrylic urethane designed to provide the ultimate in protection and long-lasting appearance. This product is formulated to fight rust while delivering durable color retention in aggressive environments. This product is a high solids, high build and sag resistant coating that's easy to apply by using multiple application methods. Excellent performance as a direct-to-metal coating or can be applied over approved ROCEpoxy® Products for premium long-term protection.


Features	For Use On
Provides The Ultimate Corrosion Protection for Aggressive Environments	<ul style="list-style-type: none"> <li>• Tanks &amp; towers</li> <li>• Equipment &amp; metal buildings</li> <li>• Structural steel &amp; rusted surfaces</li> </ul>
Extremely Durable, Chemical and Abrasion Resistance	
Ultra-Smooth Finish with High Build Capability on Edges and Welds	
Excellent UV Protection for Outstanding Color and Gloss Retention	
Eight Year Rust-Proof Guarantee*	

\*See Product's Web Page for Details

### APPLICATION



### SUBSTRATES



### COVERAGE

160-280 sq. ft./gal.

VOC <340g/L



This is a two-component system. Order base and activator separately.

### COLORS (GAL.)

<b>9886419</b>	Navy Gray	<b>9879419</b>	Black	<b>321696</b>	Flat Black
<b>9882419</b>	Silver Gray	<b>9892419</b>	White		
<b>9815419</b>	Alumi-NON®	<b>9892383</b>	White (5 gallon)		

### SAFETY COLORS (GAL.)

<b>9825419</b>	Safety Blue	<b>9844419</b>	Safety Yellow	<b>204004</b>	Safety Red
----------------	-------------	----------------	---------------	---------------	------------

### TINT BASES (GAL.)

<b>9805470</b>	Red	<b>9808405</b>	Deep	<b>332058</b>	Deep Tint Base
<b>9806470</b>	Yellow	<b>9808375</b>	Deep (5 gallon)	<b>332059</b>	Light Tint Base
<b>9807470</b>	Masstone	<b>9809415</b>	Light	<b>332057</b>	Masstone Tint Base
<b>9807370</b>	Masstone Base (5 gallon)	<b>9809377</b>	Light (5 gallon)		

### ACTIVATORS

<b>9801501</b>	Activator for 1 gallon	<b>9801419</b>	Activator for 5 gallon
----------------	------------------------	----------------	------------------------

### COMPANION PRODUCTS

<b>202548</b>	Urethane Accelerator
---------------	----------------------

Rust-Oleum Professional Solutions solvents are tailor-made blends formulated for thinning specific style coatings, but can also be used for removing grease, oil and adhesive residue, as well as cleaning equipment and surfaces.



**ACETONE**  
**333402 (GAL.)**

Acetone is formulated to thin and clean-up most alkyd, epoxy and VOC compliant coatings.



**MEK SOLVENT BLEND**  
**190402 (GAL.)**

MEK Solvent Blend is a unique blend of solvents designed to be used to thin and clean-up urethanes and epoxies.



**MINERAL SPIRITS**  
**633402 (GAL.)**

Mineral Spirits is a unique blend of solvents formulated to thin and clean-up most alkyd coatings.



**NAPHTHA SOLVENT BLEND**  
**641300 (GAL.)**  
**160300 (5 GAL.)**

Naphtha Solvent Blend is a unique blend of solvents formulated to thin and clean-up most alkyd coatings.



**OXSOL**  
**315512 (GAL.)**

Oxsol is a VOC compliant nationwide solvent that can be used to thin and clean-up most solvent-based coatings without affecting VOC levels.



**XYLENE SOLVENT BLEND**  
**160402 (GAL.)**  
**160300 (5 GAL.)**

Xylene Solvent Blend is a unique blend of solvents formulated to thin and clean-up most alkyd or epoxy coatings.

# Coatings | TECHNICAL DATA

The data contained in this chart is presented for the comparison of basic physical characteristics of Coatings. For more detailed information, see Rust-Oleum technical data sheets for individual products.	RECOMMENDED FILM THICKNESS				PERCENT VOLUME SOLIDS	COVERAGE				DRY TIME HRS. AT 70°F (21°C)– 80°F (27°C) & 50% HUMIDITY				THINNING AS NEEDED			CLEAN-UP	MIX RATIO / ACTIVATOR NO.	POT LIFE HRS. AT 70°F (21°C)–80°F (27°C) & 50% HUMIDITY	DRY HEAT RESISTANCE (°F/°C)	VOC LEVEL (g/L) VOLATILE ORGANIC COMPOUND	FLASH POINT (°F/°C)	USDA ACCEPTABLE <sup>1</sup>	APPLICATION TEMPERATURE RANGE
	WET		DRY			PRACTICAL ASSUMES 15% MATERIAL LOSS		THEORETICAL AT 1 MIL DFT.		TACK-FREE	HANDLE	RECOAT	TRAFFIC	BRUSH / ROLLER	AIRLESS SPRAY	AIR-ATOMIZED SPRAY								
	MILS	MICRONS	MILS	MICRONS		ft. <sup>2</sup> /gal.	m <sup>2</sup> /l	ft. <sup>2</sup> /gal.	m <sup>2</sup> /l															
<b>ROCAIkyd® Alkyd Enamel V7400–DTM 340VOC Alkyd Enamel</b>	2.0-3.5	50-87.5	1-2	25-50	58-61	400-830	9.8-20.4	930-975	22.9-24	3-5	8-12	24	–	–	333402 5-10%	333402 10%	333402	–	–	212°F 100°C	<340	104°F 40°C	Yes	32-100°F 0-38°C
<b>ROCAIkyd® Alkyd Enamel 7400–DTM 450VOC Alkyd Enamel</b>	3.5-6.0	87.5-150	1.5-2.5	37.5-62.5	42-43	230-390	5.7-9.6	675-690	16.6-17.0	2-4	5-9	24	–	–	333402 5%	333402 15%	333402 or 641402	–	–	212°F 100°C	<450	104°F 40°C	Yes	32-100°F 0-38°C
<b>ROCEpoxy® Direct-To-Metal Epoxy Mastic 9100 (w/9101402 Activator)</b>	6.5-10.5	162.5-262.5	5-8	125-200	78-81	125-225	3.1-5.5	1250-1300	30.8-32.0	6-8	6-12	16-72	–	–	–	160402 10%	160402	1:1 70°F	2-41	300°F 149°C	<340	110°F 43°C	Yes	50-100°F 10-38°C
<b>ROCEpoxy® Coal Tar Epoxy C9578</b>	10.5-13.5	262.5-337.5	8-10	200-250	75-77	100-130	2.5-3.2	1203-1235	29.6-30.4	3-4	18-36	16-25	–	–	160402 0-16%	160402 0-16%	160402 MEK	4:1	2 80°F	140°F 60°C	<250	86°F 48°C	No	50-100°F 10-30°C
<b>ROCEpoxy® High Solids Epoxy Primer HS9300</b>	3.0-5.0	75-125	1.5-2.5	37.5-62.5	53	275-475	6.5-11.3	835	19.9	1-2	3-4	1	–	–	333402 5-10%	333402 15-20%	333402	7:1	8-16	300°F 149°C	<450	73°F 41°C	Yes	60-100°F 16-38°C
<b>ROCThane® Fine Finish Urethane 9400 w/9401402 Activator</b>	3-5	75-125	1-2	25-50	37-41	260-560	6.4-13.8	595-660	14.6-16.2	2-4	4-6	16	–	–	190402 15%	190402 15%	190402	1:1	8-16	300°F 149°C	<450	50°F 10°C	No	32-100°F 0-38°C
<b>ROCThane® Fine Finish Urethane 9400 w/HS9401402 Activator</b>	2-4	50-100	1-2	25-50	54-58	370-790	9.1-19.4	866-930	21.3-22.9	2-4	6-8	16	–	–	195402 10-15%	195402 15-20%	190402	1:1	2-4	300°F 149°C	<450	50°F 10°C	No	32-100°F 0-38°C
<b>ROCThane® DTM Urethane Mastic 9800 w/9801501 Activator</b>	5-8	125-200	3-5	75-125	58-62	160-280	3.9-6.9	930-990	22.9-24.4	4-6	6-9	16-24	–	–	–	–	190402	5:1	2-3 70°F	300°F 149°C	<340	95°F 36°C	No	40-100°F 5-38°C
<b>ROCAIkyd® Cold Galvanizing Compound 7000</b>	3.5-4.5	87.5-112.5	2.5-3.5	62.5-87.5	54.1	310-440	7.6-10.8	1280	21.3	½ - 1	1-2	12	–	–	633402 5-10%	633402 10-15%	633402 or 641402	–	–	212°F 100°C	<500	95°F 35°C	No	32-100°F 0-38°C
<b>ROCAcrylic® Direct-to-Metal Acrylic Enamel 3800</b>	5-8	125-200	2-3	50-75	–	150-270	3.7-6.6	522-635	12.8-15.6	15 min.	45 min.	2	–	–	–	–	Soap/ Water	–	–	200°F 93°C	<250	–	–	50-100°F 10-38°C
<b>ROCAIkyd® High Heat Coating</b>	2.5-5.5	62.5-112.5	1-2	25-50	–	250-540	6.2-13.3	590-634	14.5-15.6	–	1-2	8-12	–	–	–	–	190 Thinner	–	–	400°F 204°C	<420	–	–	32-125°F 0-52°C
<b>ROCEpoxy® Direct-To-Metal Low Temperature Cure Epoxy 9200</b>	6-9.5	150-238	4-6	100-150	–	140-225	3.4-5.5	1010-1075	24.8-26.4	30 min.	3	45 min.	–	–	–	–	190 Thinner	–	–	180°F 82°C	<250	–	–	20-100°F -7-38°C
<b>MetalMax® DTM Acrylic Enamel</b>	2.5-7.5	62.5-187.5	1-3	25-75	35-39	180-545	4.4-13.4	640	15.8	30 min.	2-4	–	–	Water	Water	Water	Soap/ Water	–	–	–	0	>200°F 93°C	Yes	50-100°F 10-38°C
<b>Noxyde® Elastomeric Acrylic Coating</b>	12	300	7	175	55	110	2.7	880	21.6	2	2-4	4	–	–	–	–	Soap/ Water	–	–	176°F 80°C	<100	>200°F 93°C	Yes	46-130°F 8-55°C
<b>The MULE</b>	4-7	101-177	1.5-2.5	38-63	28-36	155-300	14.4-30.7	–	–	15 min.	45 min.	2	24	–	–	–	–	–	–	–	<50	–	–	–

# Coatings | TECHNICAL DATA

The data contained in this chart is presented for the comparison of basic physical characteristics of Coatings. For more detailed information, see Rust-Oleum technical data sheets for individual products.	RECOMMENDED FILM THICKNESS				PERCENT VOLUME SOLIDS	COVERAGE				DRY TIME HRS. AT 70°F (21°C)– 80°F (27°C) & 50% HUMIDITY				THINNING AS NEEDED			CLEAN-UP	MIX RATIO / ACTIVATOR NO.	POT LIFE HRS. AT 70°F (21°C)–80°F (27°C) & 50% HUMIDITY	DRY HEAT RESISTANCE (F°/C)	VOC LEVEL (g/L) VOLATILE ORGANIC COMPOUND	FLASH POINT (F°/C)	USDA ACCEPTABLE	APPLICATION TEMPERATURE RANGE
	WET		DRY			PRACTICAL ASSUMES 15% MATERIAL LOSS		THEORETICAL AT 1 MIL DFT.		TACK-FREE	HANDLE	RECOAT	TRAFFIC	BRUSH / ROLLER	AIRLESS SPRAY	AIR-ATOMIZED SPRAY								
	MILS	MICRONS	MILS	MICRONS		ft <sup>2</sup> /gal.	m <sup>2</sup> /l	ft <sup>2</sup> /gal.	m <sup>2</sup> /l															
<b>Beyond™ Acrylic Enamel</b>	3-8	75-200	1-3	25-75	36-38	165-520	4.1-12.8	580-610	14.3-15	30	–	2-4	–	Water	Water	Water	Soap/Water	–	–	–	0	>200°F 93°C	Yes	50-100°F 10-38°C
<b>S60 System – Water-Based Epoxy Maintenance Coating</b>	4-6	100-150	2-3	50-75	50	230-340	5.7-8.4	800	19.7	30 min.	1-3	–	–	Water	Water	Water	Soap/Water	2:1	2	–	0	>200°F 93°C	Yes	50°-100°F 10-38°C
<b>S70 System – Brush Industrial Epoxy Primer w/208112 Activator</b>	5-7	125-175	2-3	50-75	43	200-300	4.9-7.4	690	17	30 min.	1-2	–	–	Water	–	–	Soap/Water	1:1	2	–	0	>212°F 100°C	Yes	50-100°F 10-38°C
<b>Beyond™ Acrylic Enamel</b>	3-8	75-200	1-3	25-75	36-38	165-520	4.1-12.8	580-610	14.3-15	30	–	2-4	–	Water	Water	Water	Soap/Water	–	–	–	0	>200°F 93°C	Yes	50-100°F 10-38°C
<b>ROCPreme® Universal Alkyd Primer 340</b>	6-8	150-200	3.5-4.5	87.5-112.5	–	200-250	4.9-6.2	920	22.6	35 min.	–	2	–	–	–	–	190 Thinner	–	–	–	<336	–	–	40-90°F 4-32°C
<b>Universal Acrylic Primer</b>	3-6	75-150	1-2	25-50	34	350-450	8.6-11.1	545	13.4	35 min.	1	1	–	–	–	–	Soap/Water	–	–	212°F 100°C	<100	180°F 82°C	Yes	50-90°F 10-32°C
<b>ROCALyde® Direct-to-Metal Alkyd Enamel CV740</b>	3.5-5.5	87.5-137.5	1.5-2.5	37.5-62.5	46-48	255-435	6.3-10.7	750-770	18.5-18.9	4-6	8-12	24	–	–	333402 5%	333402 Up to 15%	333402 or 633402	–	–	212°F 100°C	<100	104°F 40°C	Yes	32-100°F 0-38°C
<b>Traffic &amp; Zone Striping Paint</b>	7.5-10.0	187.5-250	3-5	75-125	40	330-690	30-64	–	–	30 min.	4	8	8	Water	Water	Water	Soap/Water	–	–	–	<100	–	–	50-90°F 10-32°C

# CONCRETE PREP PATCH & REPAIR



## RUST-OLEUM CONCRETE PREP, PATCH & REPAIR

Rust-Oleum's expertise in surface protection doesn't stop at metal. Our complete selection of concrete prep, patch and repair products are formulated to deliver contractor-grade protection and are easy to apply using in-house maintenance crews. Our concrete repair products cure fast to minimize downtime and provide lasting durability for long-term protection.

# Concrete Prep, Patch & Repair



## TURBOKRETE® CONCRETE PATCHING COMPOUND

This 100% solids epoxy patch kit is designed for floors exposed to heavy traffic and intermittent chemicals. Its fast cure time minimizes downtime.

Features	For Use On
Dries 3X stronger than concrete	<ul style="list-style-type: none"> <li>• Spalled or damaged concrete floors</li> <li>• Curbs, ramps and walkways</li> <li>• Decks and traffic routes</li> </ul>
Can be used vertically and horizontally – Great for repairing steps and curbs	
Dries quickly – light traffic in 1.5 - 4 hours, heavy traffic in 6-8 hours	
Convenient premeasured three component kit	
VOC Compliant Nationwide	

### COLORS (2 GAL.)

**253479** Light Gray kit (.15 cu. ft.)

### COLORS (3.5 GAL.)

**5494323** Light Gray kit (.30 cu. ft.)

### APPLICATION



### SUBSTRATES



## TURBOKRETE® ALL-PURPOSE EPOXY REPAIR

This 100% solids epoxy patch kit is designed for floors exposed to heavy traffic and intermittent chemicals. Its fast cure time minimizes downtime.

Features	For Use On
Dries 2X stronger than concrete	<ul style="list-style-type: none"> <li>• Interior and exterior concrete</li> <li>• Spalls and leaks on vertical, horizontal or overhead surfaces</li> <li>• Also great as an adhesive</li> </ul>
No hand mixing required, product mixes in the included static mixing applicator	
Dries quickly - cures in 3 hours	
Easy flow formula compatible with most caulk guns	
VOC compliant nationwide	

### COLORS (9 OZ. CARTRIDGE)

**257395** Light Gray

### COMPANION PRODUCTS


**257397** Replacement Static Mixers (pack of 3)

**261292** Heavy-Duty Caulk Gun

### APPLICATION



### SUBSTRATES



# Concrete Prep, Patch & Repair



## FLEXIBLE JOINT SEALANT CONCRETE REPAIR

Flexible Joint Sealant is a two-component, self-leveling, 100% solids polyurea sealant that can be used to fill interior control joints or new construction saw cuts on horizontal concrete surfaces.

Features	For Use On
Available in a convenient self-contained, two-component cartridge in 9 oz. and 22. oz. sizes	<ul style="list-style-type: none"> <li>Control joints, saw cuts and interior expansion joints</li> </ul>
Fast return to service time – Vehicle traffic in 90 minutes	
Compatible with most floor coating technologies including acrylic, epoxy and polyurethane	
Can be applied at a temperature range of -40°F to 120°F	
VOC compliant nationwide	

### COLORS (22 OZ. CARTRIDGE)

**266733** 22 oz. Cartridge

### COLORS (9 OZ. CARTRIDGE)

**261998** 9 oz. Cartridge

### COMPANION PRODUCTS

**257397** Replacement Static Mixers (pack of 3)

**261292** Heavy-Duty Caulk Gun

### APPLICATION



### SUBSTRATES



## 5499 SYSTEM CONCRETE PATCHING COMPOUND

Easily repair small surface holes, cracks and pores.

Features	For Use On
No priming required and results in an extremely hard surface that is up to three times stronger than concrete	<ul style="list-style-type: none"> <li>Industrial manufacturing</li> <li>Pharmaceutical</li> <li>Aisles</li> <li>Spalled and damaged concrete floors, walkways, ramps, decks and traffic routes</li> </ul>
Dries quickly — can accept light traffic in 12 hours	
Virtually odor-free; flat, gray finish	
Kit includes one gallon of base and 1 gallon of activator — mix equal parts together	
For interior/exterior use on concrete surfaces; also works for patching wood, fiberglass or brick	

### COLORS (2 GAL. KIT)

**5499499** Concrete Gray

### APPLICATION



### SUBSTRATES



# Concrete Prep, Patch & Repair



## INSTAPATCH® ULTRA RAPID CURING CONCRETE REPAIR


Patches and repairs damaged concrete floors in minutes, significantly reducing downtime. This two-component, low odor, 100% solids polyurea repair material is the ideal solution for occupied spaces where minimal disruption is required.

Features	For Use On
Ultra rapid return to service — fully cured in 15 minutes	<ul style="list-style-type: none"> <li>• Interior and exterior horizontal concrete cracks</li> <li>• Spalls and pitting in mild to severe industrial environments</li> <li>• Warehousing</li> <li>• Food and beverage</li> <li>• Manufacturing</li> </ul>
Low temperature application — down to -5°F	
Easy to use 1:1 ratio	
Can be poured or trowel applied	
VOC compliant nationwide	

### COLORS

<b>276981</b>	Gray (1 gal. kit)
<b>284595</b>	Tile Red (1 gal. kit)
<b>378352</b>	Consav Instapatch (10 gal. kit)

### APPLICATION



### SUBSTRATES



## PUTTY PATCH™ CONCRETE REPAIR

This fast-setting, general purpose, cement-based patching material is a proprietary blend of Portland cements, aggregates and additives that achieve initial set in 10-15 minutes and final set in 20-25 minutes.

Features	For Use On
Can be molded, shaped and shaved	<ul style="list-style-type: none"> <li>• Industrial manufacturing</li> <li>• Aisles</li> <li>• Spalled and damaged concrete floors, walkways, ramps, curbs, walls and decks</li> </ul>
Stronger than concrete	
Easy to use; well suited for interior or exterior applications	
Ideal for vertical and overhead repairs	
Repairs concrete cracks and holes up to 7" deep in one application	


### COLORS (3 LB. BAG)

<b>291995</b>	Concrete Gray
---------------	---------------

### APPLICATION



### SUBSTRATES



# Concrete Prep, Patch & Repair



## POURABLE CONCRETE PATCH CONCRETE PATCHING COMPOUND

Pourable Concrete Patch makes repairing large holes and spalls easy. This fiber reinforced, easy to mix, pourable material makes quick repairs to level concrete surfaces.

Features	For Use On
Fast return to service; foot traffic in 30 minutes and vehicle traffic in as little as 2 hours	<ul style="list-style-type: none"> <li>• Industrial manufacturing</li> <li>• Aisles</li> <li>• Spalled and damaged concrete floors, walkways, ramps, curbs, walls and decks</li> </ul>
Just add water, mix and pour	
Can be applied up to 4 inches deep in a single application	
Suitable for interior and exterior use, will set up at temperatures down to 40°F	

### COLORS

**353964** 10 lb. **291070** 55 lb.

### APPLICATION



### SUBSTRATES



## 108 CLEANING & ETCHING SOLUTION CONCRETE ETCH

This dual-action solution helps remove laitance and dissolve grease, dirt and oil while also adding a texture that concrete coatings will adhere to.

Features	For Use On
Ideal for concrete floors in warehouses, light manufacturing facilities, machine shops, etc.	<ul style="list-style-type: none"> <li>• Bare concrete floors</li> </ul>
Creates an immediate foaming action when applied	
Produces the texture of fine-grit sandpaper on the concrete surface	
Easy to use — convenient, pre-mixed formula	
Covers approximately 400 sq. ft./gallon	

### COLORS (GAL.)

**108402** Natural

### APPLICATION



### SUBSTRATES



### COVERAGE

**400 sq. ft./gal.**



## S6511 SYSTEM PENETRATING PRIME & SEAL PRIMER

This clear, high-solids primer penetrates deeply to seal pinholes and cracks, improve adhesion and form an extra layer of protection.

Features	For Use On
Increases the performance of topcoats	<ul style="list-style-type: none"> <li>• New, old, bare or previously coated concrete floors</li> <li>• Warehouses</li> <li>• Labs and more</li> </ul>
Reduces the risk of bubbles and outgassing in topcoat	
Penetrates bare concrete to secure a strong bond between the concrete and top coat	
Improves resistance to abrasion, impact and chemical spills	

### PRODUCTS (GAL.)

**S6511413** Base **S6502410** Activator

### APPLICATION



### SUBSTRATES



### COVERAGE

**180-260 sq. ft./gal.**

# Concrete Prep, Patch & Repair



## HARD SURFACE PRIMER WATER-BASED EPOXY PRIMER


Hard Surface Primer is a two-component, water-based epoxy primer designed to improve the adhesion of floor coatings over difficult to coat, or marginally prepared substrates. Substrates include; hard-troweled concrete, aluminum and various types of tiles. Hard Surface Primer can be topcoated with most types of floor coating technologies including acrylic, epoxies and polyurethanes.

Features	For Use On
Alternative to traditional mechanical and chemical surface preparation	<ul style="list-style-type: none"> <li>• Hard troweled concrete</li> <li>• Marginally prepared surfaces</li> <li>• Aluminum and various types of tiles</li> </ul>
Excellent as a primer/basecoat for warehouse line striping, zone marking solid color and decorative floor coatings - including metallic systems	
Can be topcoated after 5 hours and before 7 days without sanding	
Compatible with most floor coating technologies including acrylic, epoxies and polyurethanes	
VOC compliant nationwide	

### COLORS (120 OZ. KIT)

<b>313973</b>	Gray	<b>353861</b>	Black
<b>353859</b>	Silver Gray		
<b>353862</b>	White		

### APPLICATION



### SUBSTRATES



### COVERAGE

250-350 sq. ft./gal.



## TURBOPRIME™ HIGH SOLIDS EPOXY PRIMER & CONCRETE SEALER

An easy-to-mix, easy-to-apply, fast-curing high solids epoxy primer/concrete sealer. TurboPrime creates an easy to clean surface that protects against dust, water, mild chemicals and is VOC compliant nationwide.

Features	For Use On
Topcoat in as little as 1 hour	<ul style="list-style-type: none"> <li>• New or old bare concrete floors</li> </ul>
Penetrates deep into the concrete, reducing the risk of outgassing in the topcoat	
Excellent primer for 100% solids epoxies	
VOC compliant nationwide	

### PRODUCTS (GAL.)

<b>241099</b>	Base	<b>241200</b>	Activator
---------------	------	---------------	-----------

### APPLICATION



### SUBSTRATES



### COVERAGE

400-460 sq. ft./gal.



# Concrete Prep, Patch & Repair



## WATER-BASED TOPSIDE VAPOR BARRIER

Water-Based TVB is a two-component epoxy primer for concrete floors.

### Features

Tenacious adhesion to damp concrete and green concrete as early as 48 hours after placement

Holds back up to 12 lbs of moisture vapor transmission and is unaffected by pH levels up to 14

Compatible with most floor coating technologies including acrylic, epoxy and polyurethane

Can be used as part of a resinous flooring system or underneath tile, carpet or hardwood flooring

VOC compliant nationwide

*This is a two-component system. Order base and activator separately.*

### WATER-BASED

**277494** Part A Resin (59 fl oz in a one gallon container)

**278268** Part B Activator (81 fl oz in a two gallon container)

### COVERAGE

**250 sq. ft./gal.**



## 100% SOLIDS TOPSIDE VAPOR BARRIER

Topside Vapor Barrier 100% Solids Epoxy is a two-component epoxy primer for concrete floors. It has excellent adhesion to moisture laden slabs and can be used to remedy concrete floors with high moisture levels before the application of the finish coating.

### Features

Tenacious adhesion to damp concrete

Holds back up to 25 lbs of moisture vapor transmission and is unaffected by pH levels up to 14

Compatible with most floor coating technologies including acrylic, epoxy and polyurethane

Can be used as part of a solid color or broadcast resinous flooring system, or underneath tile, carpet or hardwood flooring

VOC compliant nationwide

*This is a two-component system. Order base and activator separately.*

### 100% SOLIDS

**278269** Base (3 gallons in a 5 gallon pail)

**277500** Activator (81 fl oz in a two gallon container)

### COVERAGE

**80-100 sq. ft./gal.**

# Concrete Prep, Patch & Repair

## CONCRETE PREP, PATCH & REPAIR TECHNICAL DATA

The data contained in this chart is presented for the comparison of basic physical characteristics of Concrete Saver Floor Coatings. For more detailed information, see Rust-Oleum technical data sheets for individual products.	RECOMMENDED FILM THICKNESS				PERCENT VOLUME SOLIDS	COVERAGE				DRY TIME HRS. AT 70°F (21°C)– 80°F (27°C) & 50% HUMIDITY				THINNING AS NEEDED			CLEAN-UP	MIX RATIO / ACTIVATOR NO.	POT LIFE HRS. AT 70°F (21°C)–80°F (27°C) & 50% HUMIDITY	DRY HEAT RESISTANCE (F/°C)	VOC LEVEL (g/l) VOLATILE ORGANIC COMPOUND	FLASH POINT (F/°C)	USDA ACCEPTABLE <sup>1</sup>	APPLICATION TEMPERATURE RANGE
	WET		DRY			PRACTICAL ASSUMES 15% MATERIAL LOSS		THEORETICAL AT 1 MIL DFT.		TACK-FREE	HANDLE	RECOAT	TRAFFIC	BRUSH / ROLLER	AIRLESS SPRAY	AIR-ATOMIZED SPRAY								
	MILS	MICRONS	MILS	MICRONS		ft. <sup>2</sup> /gal.	m <sup>2</sup> /l	ft. <sup>2</sup> /gal.	m <sup>2</sup> /l															
<b>Turbokrete® Concrete Patching Compound</b>	—	—	—	—	100	.15-30 cu. ft.	—	—	—	—	2-4	1.5-8	—	—	—	160402	—	½	—	N/A	185°F 85°C	No	45-90°F 7-32°C	
<b>Turbokrete® All-Purpose Epoxy Repair</b>	—	—	—	—	—	*	—	—	—	2	—	2	2	—	—	—	—	1:1	—	—	—	—	—	—
<b>Flexible Joint Sealant</b>	—	—	—	—	—	**	—	—	—	45 min	—	90 min	90 min	—	—	—	—	1:1	—	—	—	—	—	—
<b>5499 System – Concrete Patching Compound</b>	—	—	—	—	94	12.5	.3	—	—	2-3	—	16	16-72	—	—	—	160402	1:1	5/6	140°F 60°C	N/A	140°F 60°C	No	50-100°F 10-38°C
<b>Instapatch® Concrete Repair System</b>	—	—	—	—	—	230 lin. ft.	—	—	—	5 min	—	—	30 min	—	—	—	—	—	—	—	—	—	—	—
<b>108 Cleaning &amp; Etching Solution</b>	—	—	—	—	—	400	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
<b>S6511 System – Penetrating Prime &amp; Seal Primer</b>	6-9	—	5.5-8	—	89	180-260	4.4-6.4	1430	35.1	6-8	—	8-24	—	—	—	—	—	1.5:1	1/2	—	250	—	No	—
<b>TurboPrime™ –Type 1</b>	3.0	—	2.0	—	67.3	400-460	—	1079	26.5	—	—	1-2	—	—	—	—	—	3:1	—	—	100	52°F 11°C	—	—
<b>Eco Prime™ Polyurea Primer</b>	—	—	—	—	100	500-700	—	—	—	1-2	—	1-12	—	—	—	—	—	—	—	—	10	—	—	—
<b>100% Solids – Topside Vapor Barrier</b>	16	400	16	400	100	80-100	—	—	—	—	—	12-14	—	—	—	—	—	3:2	20-30 min.	—	0	—	—	50-100°F 10-38°C
<b>Water-Based – Topside Vapor Barrier</b>	6.4	160	—	—	50	250	—	—	—	—	—	5-8	—	—	—	—	—	1:1.2	1 hr.	—	0	—	—	60-80°F 15.5-26.66°C

\*Practical Coverage - 10.56 linear ft., 1/2" deep x 1/4" wide  
 \*\*Practical Coverage - 13.3 feet, 1/4" joint x 1" deep



## RUST-OLEUM FLOOR COATINGS

Rust-Oleum's diverse product offering provides a cost effective, durable solution for every industry and every environment. Our range of products include Concrete Saver® and Sierra Performance™ brands for application using in-house crews. Whatever the floor coating project, Rust-Oleum has the right solution for you.



# Floor Coatings



## 5600 SYSTEM ACRYLIC URETHANE FLOOR PAINT


5600 System Acrylic Urethane Floor Paint is a single-component urethane modified acrylic coating designed for use on concrete floors.

Features	For Use On
User friendly single-component floor coating available in 7 colors	<ul style="list-style-type: none"> <li>Interior and exterior concrete floors</li> </ul>
Fast return to service time – Foot traffic in 24 hours, vehicle traffic in 72 hours	<ul style="list-style-type: none"> <li>Walkways</li> </ul>
Meets USDA requirements for incidental food contact	<ul style="list-style-type: none"> <li>Decks and patios in mild industrial and commercial environments exposed to heavy and light rubber wheeled traffic</li> </ul>
Soap and water clean-up	
VOC compliant nationwide	

### COLORS (GAL.)

<b>261117</b>	Safety Blue	<b>251286</b>	Safety Yellow
<b>261118</b>	Safety Green	<b>251289</b>	White
<b>261116</b>	Safety Orange	<b>251291</b>	Silver Gray
<b>261115</b>	Safety Red	<b>251293</b>	Silver Gray (5 gallons)

### APPLICATION



### SUBSTRATES



### COVERAGE

170-270 sq. ft./gal.



## 6000 SYSTEM WATER-BASED EPOXY

This two-component, water-based, epoxy floor coating creates a durable, high gloss finish ideal for mild to moderate industrial settings.

Features	For Use On
Offers the performance of a solvent-based epoxy and the convenience of a water-based finish	<ul style="list-style-type: none"> <li>Floor coating for mild to moderate industrial environments</li> </ul>
Can withstand occasional exposure to steam, hot water, high humidity and mild chemicals	<ul style="list-style-type: none"> <li>Clean rooms, laboratories and schools</li> </ul>
Handles handcarts, forklifts and heavy foot traffic	<ul style="list-style-type: none"> <li>Cafeterias and hospitals</li> </ul>
Extended pot life for longer working time	
Low odor, soap-and-water clean-up	

Base and activator ordered separately. Combine for 1 gallon activated.


### COLORS (GAL.)

<b>6086408</b>	Navy Gray	<b>6010408</b>	Clear
<b>6082408</b>	Silver Gray		

### ACTIVATOR

<b>6001604</b>	Activator
----------------	-----------

### APPLICATION



### SUBSTRATES



### COVERAGE

200-350 sq. ft./gal.



# Floor Coatings



## ROCEPOXY® DIRECT-TO-METAL EPOXY MASTIC 9100

ROCEpoxy® Direct-To-Metal Epoxy Mastic 9100 is a two-component, high solids epoxy coating that provides a durable, abrasion and chemical resistant protective surface suitable for most all industrial environments. As Rust-Oleum's most versatile industrial product, it can be applied directly to sound rusted steel, galvanized metal, clean steel, concrete, and even slightly damp surfaces. This product was developed with the end user in mind. It has a convenient 1:1 mix ratio, a pot life of a minimum of two hours, and has multiple activator options, including: Fast Cure, Low Temp, Immersion, Satin Finish as well as the Standard activator. Can also be used as a primer under Rust-Oleum ROCThane® high performance topcoats. ROCEpoxy® Direct-To-Metal Epoxy Mastic 9100 is available in two VOC levels, 340 VOC and 250 VOC, depending on the activator you choose.

Features	For Use On
Extremely Versatile, Easy to Use, Durable, Solvent-Based Epoxy	<ul style="list-style-type: none"> <li>Steel beams, structural steel and towers</li> </ul>
Direct-To-Metal and Self-Priming on a Variety of Substrates	<ul style="list-style-type: none"> <li>Concrete floors and conveyors</li> </ul>
Ultra-Smooth Finish with High Build Capability on Edges and Welds	<ul style="list-style-type: none"> <li>Industrial equipment and storage tanks</li> </ul>
Superior Resistance to Solvents, Chemical, Abrasion and Impact	<ul style="list-style-type: none"> <li>Sewage treatment basins</li> <li>Non-potable water storage facilities</li> </ul>
Five Year Rust-Proof Guarantee*	<ul style="list-style-type: none"> <li>Steel handrails</li> </ul>

### STANDARD ACTIVATOR

- For air and surface temperatures of 50-100°F (10-38°C)

### IMMERSION ACTIVATOR

- For fresh or salt water immersion of steel or concrete where water temperatures do not exceed 125°F (52°C)
- Great for use in floor coating applications
- Produces slightly lower gloss than standard activator
- Not for use in potable water tanks

### LOW TEMPERATURE ACTIVATOR

- For air and surface temperatures of 40-60°F (5-15°C)

### FAST-CURE ACTIVATOR

- Faster cure to minimize downtime
- Recoat in 4 hours at 70°F (21°C) and 50% RH
- For air and surface temperature of 50-100°F (10-38°C)
- Produces slightly lower gloss than standard activator

*This is a two-component system. Order base and activator separately.*

### COLORS (GAL.)

<b>9171402</b> Dunes Tan	<b>9186300</b> Navy Gray (5 gallon)	<b>9179402</b> Black
<b>9171300</b> Dunes Tan (5 gallon)	<b>9182402</b> Silver Gray	<b>9192402</b> White
<b>9122402</b> Marlin Blue	<b>9182300</b> Silver Gray (5 gallon)	<b>9192300</b> White (5 gallon)
<b>9186402</b> Navy Gray	<b>9115402</b> Aluminum	

### SAFETY COLORS (GAL.)

<b>9125402</b> Safety Blue	<b>9144402</b> Safety Yellow	<b>204005</b> Safety Orange
<b>9133402</b> Safety Green	<b>204006</b> Safety Red	<b>297081</b> Safety Orange (5 gallon)


### TINT BASES (GAL.)

<b>9105405</b> Red	<b>9107405</b> Masstone	<b>9108381</b> Deep (5 gallon)
<b>9106405</b> Yellow	<b>9108421</b> Deep	<b>9109408</b> Light


### ACTIVATORS

<b>205015</b> Standard (<250 g/L)	<b>9102402†</b> Immersion (<340 g/L)	<b>9101402</b> Standard (<340 g/L)
<b>214430†</b> Immersion (<250 g/L)	<b>9102300†</b> Immersion (<340 g/L) (5 Gal.)	<b>9101300</b> Standard (<340 g/L) (5 Gal.)
<b>9103402</b> Low Temp. (<340 g/L)	<b>9104402†</b> Fast Dry (<340 g/L)	
<b>214432</b> Fast Dry (<250 g/L)	<b>A910008300†</b> Fast Dry (<340 g/L) (5 Gal.)	
<b>331254</b> Satin Activator (<250 g/L)	<b>206232</b> Low VOC Standard (<250 g/L)	

### APPLICATION



### SUBSTRATES



### COVERAGE

125-225 sq. ft./gal.



† Not for use with Tint Bases

# Floor Coatings




## 8000S-FC SYSTEM 100% SOLIDS FAST-CURE EPOXY


8000s FC is a 100% Solids Fast-Cure General Purpose Epoxy that provides outstanding customer value. Its great value, fast dry time, and low odor formulation makes 8000s FC ideal for decorative chip and quartz broadcast applications that can be completed in one day.

Features	For Use On
Fast Curing formula for quick return to service	<ul style="list-style-type: none"> <li>• Warehousing and showrooms</li> <li>• Mechanical areas</li> <li>• Storage facilities</li> <li>• Topcoat in heavy-duty areas</li> </ul>
Versatile - Direct to Concrete, broadcast floors	
Low odor 100% solids	
Tenacious adhesion	
Moisture Vapor Transmission Tolerant*	
VOC compliant nationwide	

\*Contact Sales representative for recommendation  
Base and activator included in two-component kit. Combine for 1 gallon activated.



### SUBSTRATES



### COVERAGE

100 sq. ft./gal.



### 3 GALLON KITS

<b>393821</b>	Light Gray	<b>393823</b>	Dunes Tan	<b>393825</b>	Custom
<b>393822</b>	Armor Gray	<b>393824</b>	Clear		

### 15 GALLON KITS

<b>393831</b>	Light Gray	<b>393833</b>	Dunes Tan	<b>393835</b>	Custom
<b>393832</b>	Armor Gray	<b>393834</b>	Clear		



# Floor Coatings



## 6700 SYSTEM EXTENDED POT LIFE 100% SOLIDS EPOXY

6700 System 100% Solids Epoxy uses a unique cycloaliphatic hybrid chemistry that provides a high gloss, chemical and abrasion resistant finish for use in industrial and commercial environments. This unique chemistry also provides a 60 minute working time for an easy application experience for the end user.

Features	For Use On
User friendly – Easy to mix two component system with a 60 minute pot life	<ul style="list-style-type: none"> <li>Warehousing and showrooms</li> <li>Mechanical areas</li> <li>Storage facilities</li> <li>Topcoat in heavy-duty areas</li> </ul>
High gloss, chemical and abrasion resistant finish	
Fast return to service time, light traffic in 12-16 hours, vehicle traffic in 36-48 hours	
No primer required over properly prepared concrete	
VOC compliant nationwide	

Base and activator included in two-component kit. Combine for 1 gallon activated.


### 3 GALLON KITS

<b>388956</b>	Light Gray	<b>388958</b>	Dunes Tan	<b>388960</b>	Custom
<b>388957</b>	Armor Gray	<b>388959</b>	Clear		

### 15 GALLON KITS

<b>388956</b>	Light Gray	<b>388960</b>	Custom	<b>389118</b>	Custom
<b>388957</b>	Armor Gray	<b>389115</b>	Armor Gray	<b>389119</b>	Clear
<b>388958</b>	Dunes Tan	<b>389116</b>	Light Gray		
<b>388959</b>	Clear	<b>389117</b>	Dunes Tan		

### APPLICATION



### SUBSTRATES



### COVERAGE

100 sq. ft./gal.



## 5500 SYSTEM ACRYLIC DUSTPROOFER FLOOR SEALER


This convenient, water-based coating seals concrete and prevents dusting in mild industrial or commercial settings. Great for floors, walkways, etc.

Features	For Use On
Seals bare concrete or provides a protective top coat; makes maintenance easy; low-gloss finish	<ul style="list-style-type: none"> <li>Warehouses</li> <li>Walkways</li> <li>Over stained and painted concrete</li> <li>Decks and patios</li> </ul>
Paint and go — no measuring or mixing; minimal surface prep	
Excellent coverage over new and previously coated surfaces; for interior/exterior use	
Dries fast — accepts foot traffic in 12 hours; easy application	
Low odor, soap-and-water clean-up	
Meets USDA requirements for incidental food contact; accepted for use in federally registered Canadian food facilities	

### COLORS (GAL.)

<b>251282</b>	Clear
<b>251283</b>	Clear (5 gallon)

### APPLICATION



### SUBSTRATES



### COVERAGE

150-400 sq. ft./gal.



# Floor Coatings



## 5800 SYSTEM WATER-BASED URETHANE FLOOR COATING


5800 Water-Based Urethane is a two-component, highly versatile coating that can be used on horizontal and vertical surfaces. This product also has anti-graffiti barrier coat properties.

Features	For Use On
User friendly – Easy to mix two component system with a 60 minute pot life	<ul style="list-style-type: none"> <li>Interior and exterior environments</li> </ul>
Excellent chemical, abrasion and UV resistance	<ul style="list-style-type: none"> <li>Cafeterias</li> <li>Clean rooms</li> <li>Healthcare</li> <li>Manufacturing and warehouses</li> </ul>
Non-yellowing: colors are available in a gloss finish, clear is available in gloss and matte finishes	
VOC compliant nationwide	


### COLORS

<b>353866</b>	Navy Gray	<b>359912</b>	Safety Blue
<b>353867</b>	Dune Tan	<b>353961</b>	Gloss Clear
<b>353958</b>	Tile Red	<b>353962</b>	Matte Clear

### APPLICATION



### SUBSTRATES



### COVERAGE

300-500 sq. ft./gal.



## EASYSURE® EPOXY MAINTENANCE FLOOR COATING

EasyClear Epoxy Maintenance Floor Coating is a two-component clear coat that adds durability and shine to floors that are routinely exposed to foot and rubber-tired vehicle traffic.


Features	For Use On
High gloss finish provides excellent chemical and abrasion resistance	<ul style="list-style-type: none"> <li>Interior concrete floors in mild to moderate industrial and commercial environments</li> </ul>
User friendly – 90 minute pot life	<ul style="list-style-type: none"> <li>Warehouses, showrooms and garages</li> <li>Manufacturing and storage facilities</li> </ul>
Convenient packaging – premeasured, two-component boxed kit	
VOC compliant nationwide	

Base and activator included in two-component kit. Combine for 1 gallon activated.

### KIT

**256673** 120 fl. oz. Kit

### APPLICATION



### SUBSTRATES



### COVERAGE

250-400 sq. ft./gal.





## SAFESTEP® STEP COVERS


Heavy-duty, preformed, anti-slip step covers provide a corrosion resistant surface for damaged, worn or slippery steps. (Glued and screw fixed).

### For Use On:

- Interior/exterior concrete, metal or wood stairs

### AVAILABLE SIZES (WIDTH & DEPTH)

<b>271792</b>	32" x 10" Black/Yellow Coarse Grit	<b>271800</b>	48" x 13.5" Black/Yellow Coarse Grit
<b>271795</b>	36" x 10" Black/Yellow Coarse Grit	<b>271801</b>	59" x 13.5" Black/Yellow Coarse Grit
<b>271796</b>	48" x 10" Black/Yellow Coarse Grit	<b>292460</b>	32" x 10" Black/Yellow Medium Grit
<b>271797</b>	59" x 10" Black/Yellow Coarse Grit	<b>292461</b>	36" x 10" Black/Yellow Medium Grit
<b>271798</b>	32" x 13.5" Black/Yellow Coarse Grit	<b>292462</b>	48" x 10" Black/Yellow Medium Grit
<b>271799</b>	36" x 13.5" Black/Yellow Coarse Grit	<b>292463</b>	48" x 13.5" Black/Yellow Medium Grit

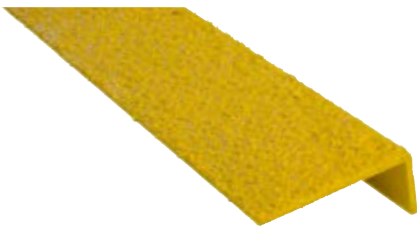

## SAFESTEP® STEP EDGE


Heavy-duty, high visibility, slip-resistant step edges. (Glued and screw fixed).

### For Use On:

- Interior/exterior concrete, metal or wood stairs

### AVAILABLE SIZES (WIDTH & DEPTH)

<b>271818</b>	32" x 2.75" x 1.25" Yellow Coarse Grit	<b>292483</b>	36" x 2.75" x 1.25" Yellow Medium Grit
<b>271819</b>	36" x 2.75" x 1.25" Yellow Coarse Grit	<b>292484</b>	48" x 2.75" x 1.25" Yellow Medium Grit
<b>271820</b>	48" x 2.75" x 1.25" Yellow Coarse Grit		
<b>271821</b>	59" x 2.75" x 1.25" Yellow Coarse Grit		
<b>292482</b>	32" x 2.75" x 1.25" Yellow Medium Grit		

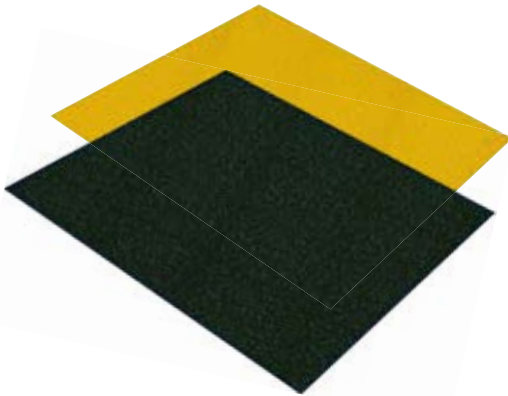

## SAFESTEP® SHEETING


Heavy-duty sheets with a tough anti-slip surface. Highly versatile and long-lasting fibreglass sheets for ramps, walkways, etc. (Glued and screw fixed).

### For Use On:

- Interior/exterior concrete, metal or wood walkway, ramps and landings

### AVAILABLE SIZES (WIDTH & DEPTH)

<b>271810</b>	47" x 47" Black Coarse Grit
<b>271811</b>	47" x 47" Safety Yellow Coarse Grit
<b>271812</b>	47" x 47" Gray Coarse Grit
<b>271813</b>	47" x 96" Black Coarse Grit
<b>271814</b>	47" x 96" Safety Yellow Coarse Grit
<b>271815</b>	47" x 96" Gray Coarse Grit
<b>292178</b>	47" x 96" Black Medium Grit

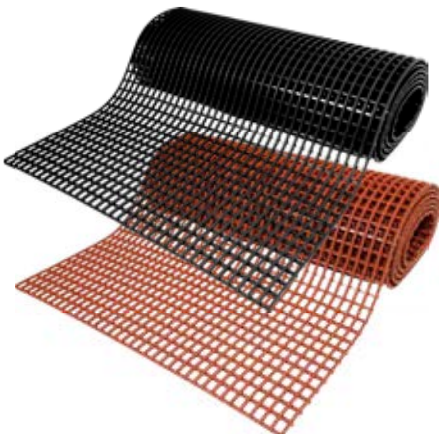

## SAFESTEP® ANTI-SLIP MATTING

SafeStep® Anti-Slip Matting products are ideal for high foot traffic areas where safety and fluid drainage is necessary. This heavy duty matting is available in two types; oil/grease resistant and animal fat resistant, to provide safe walkways in their respective environments.

### For Use On:

- Stairs, landings, platforms, ramps and wash down areas.

### FOOD PROCESSING MATTING

<b>356775</b>	2' x 33' Tile Red	<b>356759</b>	4' x 33' Tile Red
<b>356770</b>	3' x 33' Tile Red		

### GREASE RESISTANT MATTING

<b>356788</b>	2' x 33' Black	<b>356762</b>	4' x 33' Black
<b>356773</b>	3' x 33' Black		




## FASTKOTE® & FASTKOTE® UV POLYUREA FLOOR COATING

Concrete Saver FastKote® & FastKote® UV are fast-cure polyurea floor coatings that fully cure and accept vehicle traffic in only 24 hours. These high gloss coatings are highly chemical and abrasion resistant, and ideal for use in industrial and commercial facilities.




Features	For Use On
Fast return to service time; light traffic in 4-6 hours, vehicle traffic in 24 hours	<ul style="list-style-type: none"> <li>Warehousing and showrooms</li> <li>Laboratories and clean rooms</li> </ul>
Polyurea formula provides excellent chemical and abrasion resistance	<ul style="list-style-type: none"> <li>Aircraft hangers and mechanical areas</li> <li>Storage facilities</li> </ul>
User friendly brush & roller application	
Packaged as a high gloss finish. For a satin, slightly textured finish, add the Concrete Saver Durability Additive (sold separately)	
VOC compliant nationwide	

### APPLICATION



### SUBSTRATES



### COVERAGE

400 sq. ft./gal.

**VOC <100g/L**

COMPLIANT NATIONWIDE

### FASTKOTE COLORS (GAL.)

<b>277498</b> Safety Yellow	<b>277497</b> Super Light Gray
<b>277495</b> Gray	

### FASTKOTE UV COLORS (GAL.)

<b>278494</b> Super Light Gray	<b>278270</b> Safety Yellow
<b>277499</b> Clear	<b>278478</b> Gray





## FINISHKOTE™ 70 HIGH SOLIDS POLYASPARTIC FLOOR COATING

This two-component polyaspartic polyurea floor coating provides the ideal combination of ease of application, fast return to service time, UV stability and excellent chemical and abrasion resistance.


Features	For Use On
Fast return to service time; can accept vehicle traffic in 24 hours	<ul style="list-style-type: none"> <li>• Garage coating contractors</li> <li>• Industrial and commercial facilities</li> <li>• Kitchens, locker rooms, &amp; shower rooms</li> <li>• Decorative concrete applications</li> </ul>
Extremely smooth finish, available in gloss and satin	
User friendly; 35 to 40 minute pot life, can be applied with a squeegee, roller or brush	
UV stable, chemical and abrasion resistant; heat resistance up to 350°F	
VOC compliant nationwide	

### PRODUCTS (GAL.)


**353015** Clear Gloss - 1 gallon Kit

**353016** Clear Satin - 1 gallon Kit

### APPLICATION



### SUBSTRATES



### COVERAGE

250-350 sq. ft./gal.



## FINISHKOTE™ 80 HIGH SOLIDS POLYASPARTIC FLOOR COATING


This is a two-component, polyaspartic polyurea floor coating that provides an extremely durable chemical and abrasion resistant high gloss finish with UV stability.

Features	For Use On
Fast return to service time, can accept vehicle traffic in 24 hours	<ul style="list-style-type: none"> <li>• Garage coating contractors</li> <li>• Industrial and commercial facilities</li> <li>• Kitchens, locker rooms, &amp; shower rooms</li> <li>• Decorative concrete applications</li> </ul>
UV stable, chemical and abrasion resistant	
Can be used as a clear or tinted to a solid color	
Can be applied at a temperature range of 30°F to 90°F	
VOC compliant nationwide	


### PRODUCTS (KITS)

- 390145** CONSAV FK80 Fast 4 Gal Kit
- 390146** CONSAV FK80 Slow 4 Gal Kit
- 390147** CONSAV FK80 Sup Slow 4 Gal Kit
- 390148** CONSAV FK80 Low Odor 4 Gal Kit
- 390149** CONSAV FK80 Fast 10 Gal Kit
- 390150** CONSAV FK80 Slow 10 Gal Kit
- 390151** CONSAV FK80 Sup Slow 10 Gal Kit
- 390152** CONSAV FK80 Low Odor 10 Gal Kit

### APPLICATION



### SUBSTRATES



### COVERAGE

250-350 sq. ft./gal.





## ULTRAWEAR 1K ULTRA HIGH PERFORMANCE FLOOR COATING


UltraWear 1K is a ready to use, high performance gloss topcoat that provides industry leading durability and return to service performance.

Features	For Use On
Ultra fast cure in just 4 hours!	<ul style="list-style-type: none"> <li>• Garage coating contractors</li> <li>• Industrial and commercial facilities</li> <li>• Kitchens, locker rooms, &amp; shower rooms</li> <li>• Decorative concrete applications</li> </ul>
Provides excellent UV protection with chemical and abrasion resistance	
Ready to use single component floor coating	
3x more scratch and mar resistant when compared to Polyaspartics	

### PRODUCTS

**360142** Clear Gloss - 1 gallon

### APPLICATION



### SUBSTRATES



### COVERAGE

**340-660 sq. ft./gal.**



COMPLIANT NATIONWIDE



## BUILDKOTE POLYUREA FLOOR COATING PRIMER/BASECOAT


BuildKote Polyurea Basecoat is a two-component, high solids floor coating primer that provides excellent adhesion and is flexible and moves with the floor's normal expansion and contraction.

Features	For Use On
Provides excellent adhesion and is highly flexible	<ul style="list-style-type: none"> <li>• Warehousing and showrooms</li> <li>• Laboratories and clean rooms</li> <li>• Aircraft hangers and mechanical areas</li> <li>• Storage facilities</li> </ul>
Can be used horizontally or vertically for a seamless wall/floor system	
Can be top coated in as little as two hours	
Compatible with most floor coating technologies including acrylic, epoxy and polyurethane	
VOC compliant nationwide	

### PRODUCTS (KITS)

- 390133** CONSAV Bldkote Summer Clear 3 Gal Kit
- 390134** CONSAV Bldkote Winter Clear 3 Gal Kit
- 390135** CONSAV Bldkote Arctic Clear 3 Gal Kit
- 390142** CONSAV Bldkote Summer Clear 15 Gal Kit
- 390143** CONSAV Bldkote Winter Clear 15 Gal Kit
- 390144** CONSAV Bldkote Arctic Clear 15 Gal Kit
- 390127** CONSAV Bldkote Summer Lt Gray 3 Gal Kit
- 390128** CONSAV Bldkote Winter Lt Gray 3 Gal Kit
- 390129** CONSAV Bldkote Arctic Lt Gray 3 Gal Kit
- 390130** CONSAV Bldkote Summer Dun Tan 3 Gal Kit
- 390131** CONSAV Bldkote Winter Dun Tan 3 Gal Kit
- 390132** CONSAV Bldkote Arctic Dun Tan 3 Gal Kit
- 390136** CONSAV Bldkote Summer Lt Gray 15 Gal Kit
- 390137** CONSAV Bldkote Winter Lt Gray 15 Gal Kit
- 390138** CONSAV Bldkote Arctic Lt Gray 15 Gal Kit
- 390139** CONSAV Bldkote Summer Dun Tan 15 Gal Kit
- 390140** CONSAV Bldkote Winter Dun Tan 15 Gal Kit
- 390141** CONSAV Bldkote Arctic Dun Tan 15 Gal Kit

### APPLICATION



### SUBSTRATES



### COVERAGE

**80-200 sq. ft./gal.**



COMPLIANT NATIONWIDE

## CONCRETE SAVER®

Working hard to protect concrete in every area of an active industrial facility, Rust-Oleum® Concrete Saver® has a solution just for you... whatever your flooring problem. Concrete Saver is a full line of concrete repair products, coatings and toppings. Below is a summary of our most popular systems.

### GENERAL PURPOSE EPOXY - 8000S 100% SOLIDS FLOOR COATING

8000 System OverKrete is a 100% solids copolymer resin system is designed for moderate chemical environments.

#### Features

Available in smooth, orange peel, vertical cove base (Type II) and heavy duty systems (Type II)

Excellent for warehousing in light to moderate manufacturing environments

High degree of abrasion and impact resistance

### CHEMICAL RESISTANT EPOXY - 8100S PREMIUM 100% SOLIDS FLOOR COATING

8100 System OverKrete Xtra Premium 100% Solids Floor Coating is a 100% solids floor coating designed to protect against intermittent chemical spills, splashes and power washing.

#### Features

Available in smooth, orange peel, vertical and self-leveling (Type II) systems

Aesthetically pleasing with extremely high gloss finish and excellent color stability

For light to moderate chemical resistance, foot traffic and rubber-wheeled traffic

### CHEMICAL RESISTANT EPOXY - 8200S 100% SOLIDS FLOOR COATING

8200 System OverKote offers extreme chemical resistance, making it perfect for areas subject to caustic washdowns.

#### Features

Available in smooth, vertical textured, cove base (Type II), heavy duty (Type II), heavy duty vertical (Type II)

For extremely high chemical resistance, especially alkalis and acids common to the food & beverage industry

Tested in 350 chemicals for one year immersion

Excellent color retention

### NOVOLAC EPOXY - 8300S 100% SOLIDS EPOXY FLOOR COATING

8300 System OverKote Plus Novolac Epoxy provides the highest level of protection against the most corrosive industrial chemicals.

#### Features

Available in smooth, vertical, cove base (Type II), heavy-duty (Type II) and heavy duty vertical (Type II)

The best option for chemical processing, pulp & paper, food & beverage, secondary containment, sump lining and battery storage

# Floor Coatings | TECHNICAL DATA

The data contained in this chart is presented for the comparison of basic physical characteristics of Concrete Saver Floor Coatings. For more detailed information, see Rust-Oleum technical data sheets for individual products.	RECOMMENDED FILM THICKNESS				PERCENT VOLUME SOLIDS	COVERAGE				DRY TIME HRS. AT 70°F (21°C)– 80°F (27°C) & 50% HUMIDITY				THINNING AS NEEDED			CLEAN-UP	MIX RATIO / ACTIVATOR NO.	POT LIFE HRS. AT 70°F (21°C)–80°F (27°C) & 50% HUMIDITY	DRY HEAT RESISTANCE (F/°C)	VOC LEVEL (g/L) VOLATILE ORGANIC COMPOUND	FLASH POINT (F/°C)	USDA ACCEPTABLE	APPLICATION TEMPERATURE RANGE	
	WET		DRY			PRACTICAL ASSUMES 15% MATERIAL LOSS		THEORETICAL AT 1 MIL DFT.		TACK-FREE	HANDLE	RECOAT	TRAFFIC	BRUSH / ROLLER	AIRLESS SPRAY	AIR-ATOMIZED SPRAY									
	MILS	MICRONS	MILS	MICRONS		ft. <sup>2</sup> /gal.	m <sup>2</sup> /l	ft. <sup>2</sup> /gal.	m <sup>2</sup> /l																
<b>5600 System– Acrylic Urethane Floor Paint</b>	5-8	125-200	1.5-2.0	37.5-50	25-30	170-400	4.2-6.6	400-480	9.8-11.8	1-2	—	4-6	24	—	—	—	Soap/ Water	—	—	—	<100	>200°F 93°C	Yes	50-90°F 10-32°C	
<b>6000 System– Water-Based Epoxy</b>	4-6.5	100-162.5	1.5-2.5	37.5-62.5	33-37	200-350	4.9-8.6	500-600	12.3-14.8	—	—	1-2	16-72	—	—	—	Soap/ Water	7:1 6001604	6-8	—	<250	205°F 96°C	Yes	60-100°F 15-38°C	
<b>ROEpoxy® Direct-To-Metal Epoxy Mastic 9100 (with 91014 02 Activator)</b>	6.5-10.5	162.5-262.5	5-8	125-200	78-81	125-225	3.1-5.5	1250-1300	30.8-32.0	6-8	6-12	16-72	—	—	—	160402 10%	160402	1:1 70°F	2-41	300°F 149°C	<340	110°F 43°C	No	50-100°F 10-38°C	
<b>5500 System– Acrylic Dustproofer Floor Sealer</b>	—	—	—	—	—	150-400	—	—	—	—	—	3	12	—	—	—	Soap/ Water	—	—	—	<100	>200°F 93°C	Yes	50-100°F 10-38°C	
<b>EasyClear® Epoxy Maintenance Floor Coating</b>	3.0-7.0	75-175	2.0-5.0	50-125	76	400	9.8	1,221	30.0	—	—	10-24	10-96	—	—	—	160402	2:1	1.5	—	<100	B:31°F A:234°F	—	60-85°F 15.5-29°C	
<b>FastKote®</b>	4	100	3.4	100	100	400	37.16	—	—	1-2	3-6	2-12	24	—	—	—	Acetone	—	18	—	<10	—	—	50-90°F 10-32°C	
<b>FastKote® UV</b>	4	100	3.2	80	100	400	37.16	—	—	1-2	3-6	4-12	24	—	—	—	Acetone for clear	—	18	—	0	—	—	50-90°F 10-32°C	
<b>EcoPrime™</b>	2-3	50-75	2-3	50-75	100	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
<b>TurboPrime™</b>	3	75	2	50	100	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—


Visit [rustoleum.com/industrial](http://rustoleum.com/industrial) for a full line of Concrete Saver products.

# PROFESSIONAL CLEANING SOLUTIONS



## RUST-OLEUM PROFESSIONAL CLEANERS

Rust-Oleum Professional Cleaners is a full line of cleaning products specifically formulated to meet the needs of industrial environments. Whether it's degreasing tools and machinery or keeping high-traffic areas spotless, our solutions are designed to keep your facility running smoothly. Trust Rust-Oleum Professional Cleaners to deliver the performance and reliability you need.



Scan the QR code for technical data and additional product information.

# Cleaning Solutions



## GLASS CLEANER

This ready-to-use, ammonia-free formula easily removes dirt, fingerprints and other smudges.

Features	For Use On
Leaves no residue, only a streak-free shine	<ul style="list-style-type: none"> <li>• Windows</li> <li>• Stainless Steel</li> <li>• Sealed Stone</li> <li>• Appliances</li> </ul>
Also available in a Foaming Aerosol Spray	

### PRODUCT

<b>352245</b>	Glass Cleaner 32 oz. Spray	<b>381658</b>	Foaming Glass Cleaner 20 oz. Aerosol
<b>352243</b>	Glass Cleaner 1 gal.		



## NEUTRAL FLOOR CLEANER

A concentrated formula designed to effectively remove dirt, dust and grime. This neutral pH cleaner will not damage, stain or break down floor finishes.

Features	For Use On
Safe to use on most hard surface floors	<ul style="list-style-type: none"> <li>• Offices</li> <li>• Cafeterias</li> <li>• Institutions</li> <li>• Most floors</li> </ul>
Cleans and deodorizes with a fresh pine scent	

### PRODUCT

<b>352240</b>	Neutral Floor Cleaner 1 gal.	<b>388628</b>	Neutral Floor Cleaner 275 gal.
<b>385340</b>	Neutral Floor Cleaner 55 gal.		



## INDUSTRIAL LOW FOAM FLOOR CLEANER

This industrial strength formula is designed for use in manufacturing facilities, warehouses, garages and other heavy-duty environments.

Features	For Use On
Safe for use on concrete, ceramic tile, quarry tile, stainless steel and more	<ul style="list-style-type: none"> <li>• Office Buildings</li> <li>• Cafeterias</li> <li>• Institutions</li> <li>• Concrete</li> <li>• Tile</li> </ul>
Does not leave a residue	
Apply manually or with commercial floor scrubbers	
Fresh crisp lemon scent	

### PRODUCT

<b>382263</b>	Low Foam Floor Cleaner 1 gal.	<b>388627</b>	Low Foam Floor Cleaner 275 gal.
<b>388967</b>	Low Foam Floor Cleaner 55 gal.		

# Cleaning Solutions



## CARPET STAIN REMOVER

A professional strength, ready-to-use formula that helps to protect and maintain the look and freshness of your carpet.

Features	For Use On
Effectively removes the toughest stains	<ul style="list-style-type: none"> <li>• Office Buildings</li> <li>• Institutions</li> <li>• Medical offices</li> </ul>
Helps reduce carpet odors	
Works on dirt, grease, motor oil, mud, clay, urine, food spills and more	

### PRODUCT

- 352258** Carpet Stain Remover 32 oz.  
**352253** Carpet Stain Remover 1 gal.



## CLEANER DEGREASER

A water-based industrial strength cleaner degreaser that removes the toughest oil, paint, grease, grime and tar without leaving behind residue.

Features	For Use On
For use on machinery, engine parts, tools and more	<ul style="list-style-type: none"> <li>• Machine shops</li> <li>• Cafeterias</li> <li>• Kitchens</li> <li>• Garages</li> </ul>
Safe to use on most non-porous surfaces	
Color fast and fabric safe	

### PRODUCT

- 352239** Cleaner Degreaser 20 oz.      **352255** Cleaner Degreaser 55 gal.  
**352263** Cleaner Degreaser 32 oz.      **352254** Cleaner Degreaser 275 gal.  
**352261** Cleaner Degreaser 1 gal.



## GENERAL PURPOSE CLEANER

An industrial strength formula that is safe on most washable surfaces, keeping your surfaces clean and grime-free.

Features	For Use On
For use on countertops, appliances, cabinets, painted doors and trim	<ul style="list-style-type: none"> <li>• Windows</li> <li>• Stainless Steel</li> <li>• Sealed Stone</li> <li>• Appliances</li> </ul>
Cleans stainless steel, tile and porcelain	

### PRODUCT

- 352264** General Purpose Cleaner 32 oz.  
**352262** General Purpose Cleaner 1 gal.

# Cleaning Solutions



## MULTI PURPOSE PRESSURE WASHER CONCENTRATE

A multi-purpose, biodegradable and bleach-free formula that makes outdoor cleaning jobs easier.

Features	For Use On
Removes oil, grease, grime, mold & mildew stains and more	<ul style="list-style-type: none"> <li>• Building exteriors</li> </ul>
For use on a variety of surfaces, including concrete, brick, asphalt, masonry and stucco	<ul style="list-style-type: none"> <li>• Driveways</li> <li>• Garage floors</li> </ul>
No scrubbing needed	<ul style="list-style-type: none"> <li>• Pools</li> </ul>

### PRODUCT

**352251** Multi Purpose Pressure Washer Concentrate 1 gal.



## HAND CLEANER WITH PUMICE

This proprietary hand cleaner with pumice is designed to quickly remove dirt, oil, grease and paint from hands.

Features	For Use On
Clinically tested, safe for skin	<ul style="list-style-type: none"> <li>• Bathrooms</li> </ul>
Comes in lemon and cherry scents	<ul style="list-style-type: none"> <li>• Kitchens</li> <li>• Restaurants</li> </ul>
Cartridge system loads easily into wall-mount dispenser unit	<ul style="list-style-type: none"> <li>• Hospitals</li> </ul>

### PRODUCT

**383462** Hand Cleaner, Blue Lemon Scent 1 gal.

**383463** Hand Cleaner, Red Cherry Scent 1 gal.

**383464** Hand Cleaner Dispenser



## INDUSTRIAL QUALITY PROFESSIONAL SPRAYER

Refillable 32 oz. trigger spray bottle with Rust-Oleum Professional Cleaners branding for use with cleaners and other liquids.

Features	For Use With
Fully adjustable spray nozzle	<ul style="list-style-type: none"> <li>• Cleaners</li> </ul>
Heavy-duty comfort grip trigger	<ul style="list-style-type: none"> <li>• Liquids</li> <li>• Deodorizers</li> </ul>
Easy-to-use fill lines for dilution of concentrates	<ul style="list-style-type: none"> <li>• Concentrates</li> </ul>

### PRODUCT

**394872** Empty Trigger Spray Bottle 32 oz.



11 Hawthorn Pkwy., Vernon Hills, IL 60061  
800-323-3584 [rustoleum.com/industrial](http://rustoleum.com/industrial)



200 Confederation Pkwy., Concord, ON L4K 4T8  
800-387-3625 [rustoleum.ca/industrial](http://rustoleum.ca/industrial)